

**OptiX OSN 8800 T64/T32 Intelligent Optical
Transport Platform
V100R006C00
Product Overview**

Issue 03
Date 2011-09-15

HUAWEI TECHNOLOGIES CO., LTD.



Copyright © Huawei Technologies Co., Ltd. 2011. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute the warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base
Bantian, Longgang
Shenzhen 518129
People's Republic of China

Website: <http://www.huawei.com>

Email: support@huawei.com

Contents

1 Introduction.....	1
1.1 Positioning	1
1.2 Product Features.....	3
2 Product Architecture.....	7
2.1 System Architecture	7
2.2 Hardware Architecture	8
2.2.1 Cabinet.....	8
2.2.2 Subrack	9
2.2.3 Board.....	9
2.2.4 Small Form-Factor Pluggable (SFP) Module.....	9
2.3 Software Architecture.....	9
2.3.1 Overview.....	9
2.3.2 Communication Protocols and Interfaces	9
3 Functions and Features	9
3.1 Service Access.....	9
3.1.1 Types of Service Access.....	9
3.1.2 Capability of Service Access.....	9
3.2 Electrical Layer Grooming.....	9
3.2.1 OTN Centralized Grooming.....	9
3.2.2 OCS Centralized Grooming.....	9
3.3 Optical Layer Grooming	9
3.4 Transmission System.....	9
3.4.1 40G Transmission System.....	9
3.4.2 Hybrid Transmission of 40G and 10G Signals.....	9
3.4.3 Transmission Distance	9
3.5 Protection	9
3.5.1 Equipment Level Protection.....	9
3.5.2 Network Level Protection	9
3.6 Data Characteristics.....	9
3.6.1 OAM.....	9
3.7 Optical Power Management	9
3.8 WDM Technologies	9

3.8.1 DWDM and CWDM Technical Specifications	9
3.8.2 Nominal Central Wavelength and Frequency of the DWDM System	9
3.8.3 Nominal Central Wavelengths of the CWDM System	9
3.8.4 PID Technology	9
3.9 Clock Feature	9
3.9.1 Physical Clock	9
3.9.2 PTP Clock (IEEE 1588 v2)	9
3.10 ASON Management	9
4 Network Application.....	9
4.1 Networking and Applications	9
4.1.1 Basic Networking Modes	9
4.1.2 Typical OTN Networking	9
4.1.3 Typical OCS Networking	9
5 About the ASON	9
5.1 Overview	9
5.1.1 Background and Advantages	9
5.1.2 Features of the ASON	9
6 Technical Specifications	9
6.1 General Specifications	9
6.1.1 Cabinet Specifications	9
6.1.2 Subrack Specifications	9
A Power Consumption, Weight, and Valid Slots of Boards.....	9

1 Introduction

About This Chapter

1.1 Positioning

The OptiX OSN 8800 T32 and OptiX OSN 8800 T64 are mainly applicable to the backbone core layers. They are also applicable to the core layers and metropolitan convergence layers.

1.2 Product Features

As an intelligent OTN product, the equipment integrates functions such as WDM transport, ROADM, 40G, electrical T-bit cross-connection, cross-connections of any granularity in the range of 100M to 40G, ASON, and rich management and protection.

1.1 Positioning

The OptiX OSN 8800 T32 and OptiX OSN 8800 T64 are mainly applicable to the backbone core layers. They are also applicable to the core layers and metropolitan convergence layers.


The OptiX OSN 8800 T32 and OptiX OSN 8800 T64 can be used with the metropolitan DWDM equipment, SDH equipment, and data communication equipment at the backbone layer to provide a large-capacity transport channel for services and network egresses. The OptiX OSN 8800 T32 and OptiX OSN 8800 T64 apply to the long-distance and large-capacity transmission of nation-level trunk and inter-province trunk to maximally meet the requirements of large-capacity and ultra-long haul transmission for carriers. In addition, the OptiX OSN 8800 T32 and OptiX OSN 8800 T64 provide carriers with a stable platform for multi-service operation and future network capacity expansion.

The OptiX OSN 8800 T32 and OptiX OSN 8800 T64 use dense wavelength division multiplexing (DWDM) technologies to achieve transparent transmission with multiple services and large capacity. It not only provides service grooming at the optical layer on a wavelength basis by using the ROADM technology, but also provides sub-wavelength grooming based on ODU3/ODU2/ODU1/ODU0. This improves the flexibility in service grooming and bandwidth utilization to a great extent.

The OptiX OSN 8800 can interconnect with the OptiX OSN 6800/OptiX OSN 3800/OptiX OSN 1800 to form an end-to-end OTN network. Also, they can interconnect with the OptiX BWS 1600G to form a WDM network. Typically, the OptiX OSN 8800 is applied to the OTN network. In addition, the OptiX OSN 8800 can interconnect with the NG SDH/PTN or data communication equipment to form a hybrid network, realizing a complete transport solution.


This is usually applied to the OCS network. Figure 1-1 and Figure 1-2 show the position of the OptiX OSN 8800 T32 and OptiX OSN 8800 T64 in the overall network hierarchy.

Figure 1-1 Position of the OptiX OSN 8800 in the network hierarchy (OTN network)

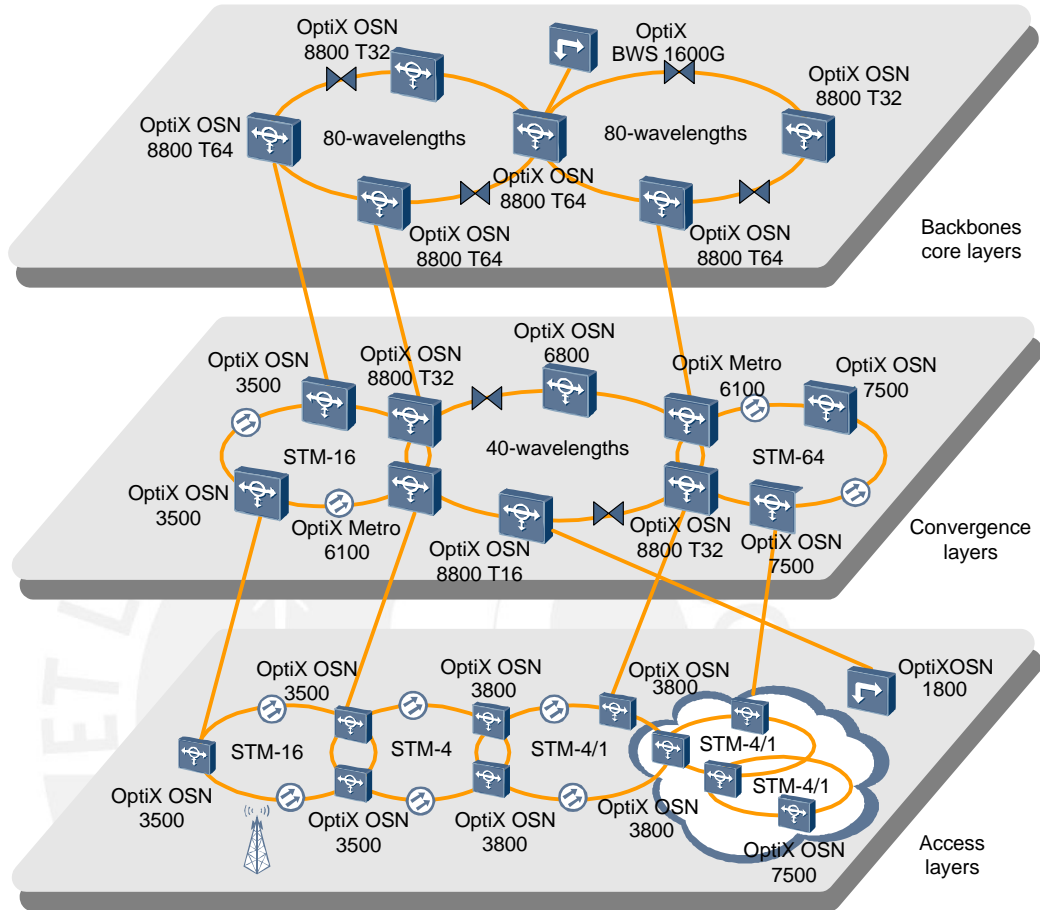

NOTE
The OptiX OSN 8800 provides OptiX OSN 8800 T64 subracks, OptiX OSN 8800 T32 subracks and OptiX OSN 8800 T16 subracks.

Figure 1-2 Position of the OptiX OSN 8800 in the network hierarchy (OCS network)

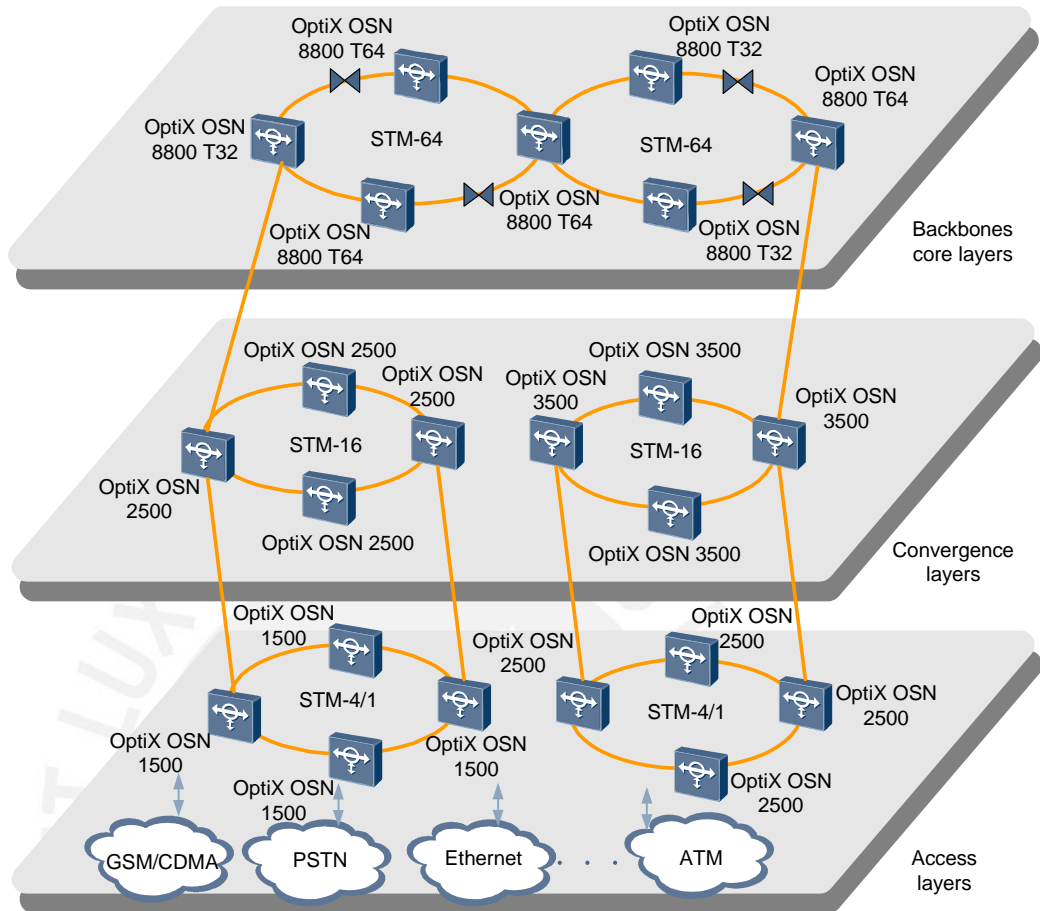

NOTE
The OptiX OSN 8800 provides OptiX OSN 8800 T64 subracks and OptiX OSN 8800 T32 subracks.

1.2 Product Features

As an intelligent OTN product, the equipment integrates functions such as WDM transport, ROADM, 40G, electrical T-bit cross-connection, cross-connections of any granularity in the range of 100M to 40G, ASON, and rich management and protection.

Transmission Equipment with High Integration and Ultra Capacity

The equipment is of high integration, which enables flexible service configuration. A network built with the equipment is easy to design, to expand, and to maintain, and requires a smaller number of spare parts.

The equipment supports access of massive services and centralized cross-connections and management of the services. This avoids assembly of multiple subracks. The equipment is of high integration. For example, one PID chip is integrated with tens of photoelectric components to achieve 12 x 10G transmission.

When used as an 80/40-channel system, the OptiX OSN 8800 T32 and OptiX OSN 8800 T64 support:

- Service access over one channel of 2.5 Gbit/s, 10 Gbit/s, 40 Gbit/s.
- Transmission of 10 Gbit/s services over a distance of 5000 km, 40 Gbit/s services over a distance of 2000 km without electrical regeneration.
- Ultra long-haul transmission of 10 Gbit/s services over a 1 x 82 dB single span.

The OptiX OSN 8800 T32 and OptiX OSN 8800 T64 CWDM systems support service access over eight wavelengths. Each wavelength supports a maximum rate of 2.5 Gbit/s.

The ASIC and PID technologies enable design of a board with high density and help reduce power consumption of each port. Ultra cross-connections help reduce bridging at many ODF and also save space in telecommunications rooms.

Figure 1-3 shows the appearance of the OptiX OSN 8800 T64.

Figure 1-3 The appearance of the OptiX OSN 8800 T64



Figure 1-4 shows the appearance of the OptiX OSN 8800 T32.

Figure 1-4 The appearance of the OptiX OSN 8800 T32



The OptiX OSN 8800 T32 supports centralized cross-connections through a cross-connect board. The OptiX OSN 8800 T32 provides one type of cross-connection boards, that is, XCH. It supports hybrid cross-connections of ODU3, ODU2, ODU1, ODU0 signals, and supports a 1.28 Tbit/s cross-connect capacity to the maximum.

The OptiX OSN 8800 T64 provides three types of cross-connect boards, that is, XCT, SXH and SXM. The XCT must be used together with SXH or SXM. The OptiX OSN 8800 T64 supports hybrid cross-connections of ODU3, ODU2, ODU1, ODU0 signals, and supports a 2.56 Tbit/s cross-connect capacity to the maximum.

Dynamic Optical-Layer Cross-Connections

Dynamic intra-ring grooming and inter-ring grooming can be realized by using the ROADM board.

Dynamic optical layer grooming can be classified into intra-ring grooming and inter-ring grooming, or into two-dimensional grooming and multi-dimensional grooming.

Dimension refers to transmission direction. Two-dimensional grooming refers to wavelength grooming in two transmission directions. Multi-dimensional grooming refers to wavelength grooming in multiple transmission directions.

Full Service Access over Shared 10G and 40G Channels

The ODUk sub-wavelengths can be flexible combined to share 10G/40G line bandwidth for transmission. This enables uniform carrying of any services over one wavelength and thus improves wavelength utilization to a great extent.

Bandwidth is tailored for services. This improves the efficiency of transmission bandwidth and achieves "zero waste" of bandwidth.

Hybrid O/E Cross-Connections and Quick Service Deployment

Hybrid O/E cross-connections achieve flexible cross-connections of wavelength or sub-wavelength services. Quick service deployment helps reduce CapEx. On a flattened network, services are easy to plan, deploy, and expand. Much less time needs to be taken to provision a service.

High Reliability

The equipment supports the line-tributary-separate structure to protect investment on equipment.

Rich OAM, Easy Maintenance, and Lower OpEx

The rich O/E overhead information on OTN equipment leads to a more transparent network, facilitates fault identification, and helps reduce maintenance costs.

The PRBS function enables quick self-check of OTUs, quick assessment of channel performance, and quick fault identification.

The "5A" auto-adjustment function:

- Automatic level control (ALC) function effectively resolves the problem of attenuation of fibers operating over a long term.
- Automatic gain control (AGC) enables adaptation to transient changes in the number of wavelengths.
- Automatic power equilibrium (APE) enables auto-optimization of OSNR specification of each channel.
- Intelligent power adjustment (IPA) avoids personal injuries (to eyes or bodies) resulting from laser radiation in case of anomalies such as a fiber cut.
- The optical power adjust (OPA) is made to ensure that the input power of the OTU board and OA board meet the commissioning requirements.

Support monitor channel power, central wavelength, OSNR, and overall optical spectrum, and also supports remote real-time measurement of optical spectrum parameters.

2 Product Architecture

About This Chapter

2.1 System Architecture

The OptiX OSN 8800 T32 Intelligent Optical Transport Platform and OptiX OSN 8800 T64 Intelligent Optical Transport Platform (OptiX OSN 8800 T32 and OptiX OSN 8800 T64 for short) is referred to as Huawei next generation intelligent optical transport platform.

2.2 Hardware Architecture

2.3 Software Architecture

The system software includes the board software, NE software and the network management system.

2.1 System Architecture

The OptiX OSN 8800 T32 Intelligent Optical Transport Platform and OptiX OSN 8800 T64 Intelligent Optical Transport Platform (OptiX OSN 8800 T32 and OptiX OSN 8800 T64 for short) is referred to as Huawei next generation intelligent optical transport platform.

The OptiX OSN 8800 T32 and OptiX OSN 8800 T64 developed as a future-proof product according to the development trend of the IP-based long haul backbone network. It can function as either the OTN equipment or the OCS equipment to realize the compatibility of the OTN system and the OCS system. In this manner, the OptiX OSN 8800 T32 and OptiX OSN 8800 T64 provide a stable platform for multi-service operation and future network capacity expansion. When functioning as the OTN equipment, the OptiX OSN 8800 T32 and OptiX OSN 8800 T64 realize dynamic optical-layer grooming and flexible electrical layer grooming; when functioning as the OCS equipment, it realizes flexible grooming of services with small granularities at the electrical layer. In general, the OptiX OSN 8800 T32 and OptiX OSN 8800 T64 realize high integration, high reliability, and transmission of multiple services. [Figure 2-1](#) shows the OptiX OSN 8800 T32 and OptiX OSN 8800 T64 system.

Figure 2-1 System architecture of intelligent optical transport platform

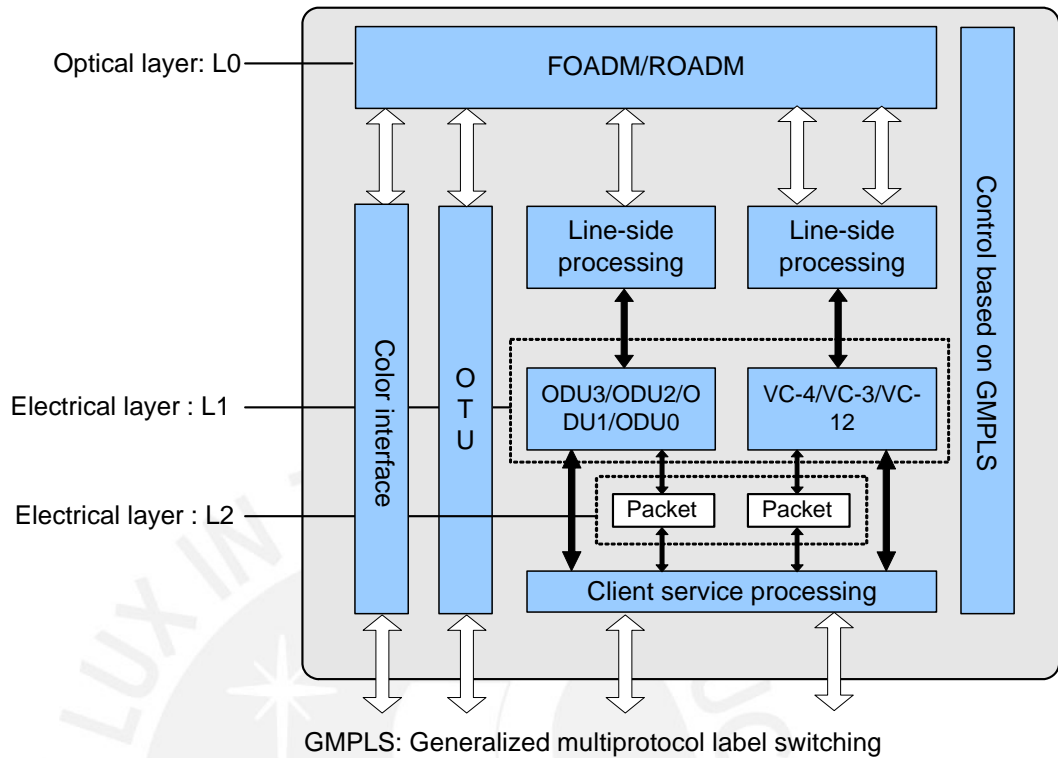


Figure 2-1 shows the architecture of intelligent optical transport platform.

L0 is the optical layer. L1 and L2 are electrical layers.

Distribution solutions of medium wavelength resource of WDM equipment include fixed optical add/drop multiplexer (FOADM) and reconfigurable optical add/drop multiplexer (ROADM).

The service granularity of the electrical grooming at the electrical layer L1 is ODU3, ODU2, ODU1, ODU0, VC-4, VC-3 or VC-12. When functioning as the OCS equipment, it supports grooming of only the VC-4, VC-3, and VC-12 signals at the electrical layer. When functioning as the OTN equipment, it supports grooming of only the ODU3, ODU2, ODU1, ODU0 signals. L2 electrical layer supports Ethernet private line (EPL) services, Ethernet virtual private line (EVPL), Ethernet Private Local Area Network (EPLAN) and Ethernet Virtual Private Local Area Network (EVPLAN) services switching based on VLAN and Stack VLAN.

2.2 Hardware Architecture

2.2.1 Cabinet

In typical configuration, the OptiX OSN 8800 T32 is installed in N63B cabinet. The OptiX OSN 8800 T64 is installed in N66B cabinet.

The OptiX OSN 8800 T32 has subracks as the basic working units. The subrack of the OptiX OSN 8800 T32 has independent power supply and can be installed in N63B cabinet, or N66B cabinet.

The OptiX OSN 8800 T64 has subracks as the basic working units. The subrack of the OptiX OSN 8800 T64 has independent power supply and can be installed in N66B cabinet.

N63B Cabinet Structure

The N63B is an ETSI middle-column cabinet with 300 mm depth, complying with the ETS 300-119 standard.

The following subracks can be installed on the N63B cabinet: OptiX OSN 8800 T32, OptiX OSN 8800 T64 and OptiX OSN 6800.

The N63B cabinet consists of the rack (main frame), open-close type front door, rear panel fixed by screws, and side panels at the left and right sides.

Cabinet doors and side panels can be disassembled. The front door and side panels have grounding points. Keys to the front door of all N63B cabinets are the same.

Figure 2-2 shows the appearance of the N63B cabinet.

Figure 2-2 N63B cabinet appearance



Configuration of the Integrated N63B Cabinet

Typical configuration of the N63B cabinet involves settings of the following items: the subrack type, the number of subracks, DCM and CRPC frames, and the PDU model.

Table 2-1 lists the typical configurations of the N63B cabinet.



NOTE

There are two types of ETSI 300 mm rear-column cabinets: T63B and N63B. These two types of cabinets differ in color and door. You can perform an expansion installation on the T63B cabinet based on the typical configurations of the N63B cabinet.

Table 2-1 Typical configurations of the N63B cabinet

Typical Configuration	Number of Subracks and Frames	PDU Model	Circuit Breaker ^a	Maximum Power Consumption of Integrated Equipment ^b	Power Consumption for the Typical Configuration
1	2 x OptiX OSN 8800 T32	TN16(TN51)	Eight 63 A circuit breakers	5400 W	< 4000 W
2	1 x OptiX OSN 8800 T32 + 2 x OptiX OSN 6800 + 2 x DCM frame	TN16(TN51)	Four 63 A and four 32 A circuit breakers	5400 W	< 4000 W
3	1 x OptiX OSN 8800 T32 + 2 x OptiX OSN + 1 x DCM frame	TN16	Eight 63 A circuit breakers	5000 W	< 4000 W
4	4 x OptiX OSN + 1 x DCM frame	TN16	Eight 63 A circuit breakers	5000 W	< 4000 W
8	4 x OptiX OSN 6800 + 1 x DCM frame	TN11	Four 63 A circuit breakers	4800 W	< 4000 W
9	3 x OptiX OSN 6800 + 2 x CRPC frame + 3 x DCM frame	TN11	Four 63 A circuit breakers	4800 W	< 4000 W
<p>a: This column lists the number of circuit breakers required on the PDF.</p> <p>b: The maximum power consumption of the integrated equipment refers to the maximum power consumption of the cabinet or the maximum heat dissipation capacity of the integrated equipment. The power consumption of the integrated equipment can not exceed the maximum power consumption.</p>					

 **NOTE**

In the case of transmission equipment, power consumption is generally transformed into heat consumption. Hence, heat consumption (BTU/h) and power consumption (W) can be converted to each other in the formula: Heat consumption (BTU/h) = Power consumption (W) / 0.2931 (Wh).

Power consumption for the typical configuration refers to the average power consumption of the device in normal scenarios. The maximum power consumption refers to the maximum power consumption of the device under extreme conditions.

N66B Cabinet Structure

The N66B is an ETSI middle-column cabinet with 600 mm depth, complying with the ETS 300-119 standard.

The following subracks can be installed on the N66B cabinet: OptiX OSN 8800 T64, OptiX OSN 8800 T32, , and OptiX OSN 6800.

The N66B cabinet consists of the rack (main frame), open-close type front and rear doors, and side panels at the left and right sides.

Cabinet doors and side panels can be disassembled. The front door and side panels have grounding points. Keys to the front and rear doors of all N63B cabinets are the same.

[Figure 2-3](#) shows the appearance of the N66B cabinet.


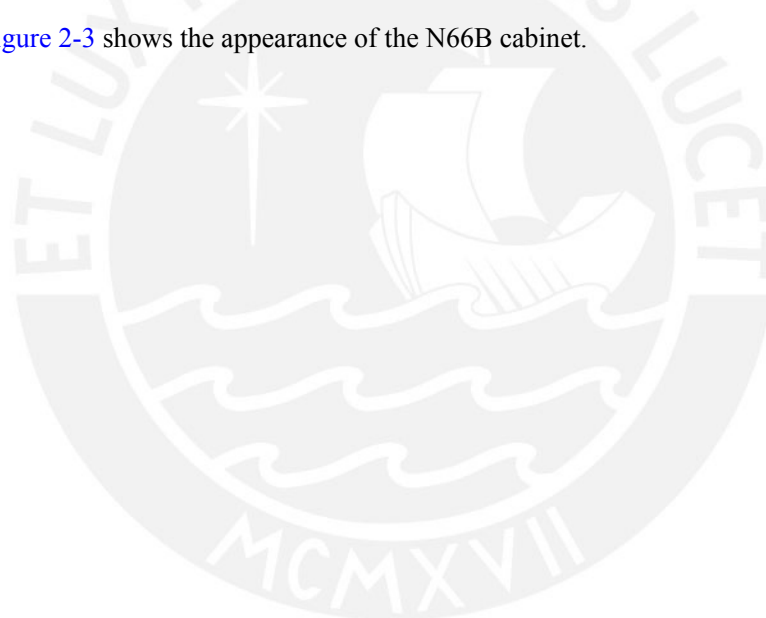


Figure 2-3 N66B cabinet appearance

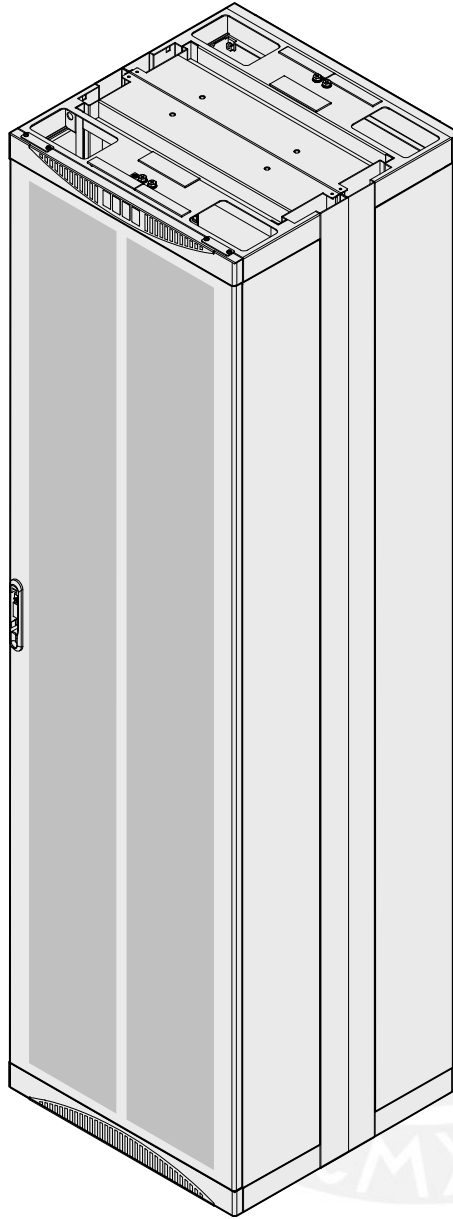

Configuration of the Integrated N66B Cabinet

Typical configuration of the N63B cabinet involves settings of the following items: the subrack type, the number of subracks, DCM and CRPC frames, and the PDU model.

Table 2-2 lists the typical configurations of the N66B cabinet.

Table 2-2 Typical configurations of the N66B cabinet

Typical Configuration	Number of Subracks and Frames	PDU Mode	Circuit Breaker ^a	Maximum Power Consumption of Integrated Equipment ^b	Power Consumption for the Typical Configuration
1	1 x OptiX OSN 8800 T64 + 2 x OptiX OSN 8800 T32 + 2 x DCM frame	TN16	Sixteen 63 A circuit breakers	10800 W	< 6000 W
2	1 x OptiX OSN 8800 T64 + 4 x OptiX OSN 6800 + 4 x DCM frame	TN16	Eight 63 A and eight 32 A circuit breakers	10800 W	< 6000 W
3	1 x OptiX OSN 8800 T64 + 4 x + 2 x DCM frame	TN16	Sixteen 63 A circuit breakers	10000 W	< 6000 W

a: This column lists the number of circuit breakers required on the PDF.
b: The maximum power consumption of the integrated equipment refers to the maximum power consumption of the cabinet or the maximum heat dissipation capacity of the integrated equipment. The power consumption of the integrated equipment do not exceed the maximum power consumption.

NOTE

In the case of transmission equipment, power consumption is generally transformed into heat consumption. Hence, heat consumption (BTU/h) and power consumption (W) can be converted to each other in the formula: Heat consumption (BTU/h) = Power consumption (W) / 0.2931 (Wh).

Power consumption for the typical configuration refers to the average power consumption of the device in normal scenarios. The maximum power consumption refers to the maximum power consumption of the device under extreme conditions.

2.2.2 Subrack

The OptiX OSN 8800 T64 and OptiX OSN 8800 T32 take subracks as the basic working units.


Subracks should be installed in the cabinet with 50 mm spacing above and below to allow airing. The DC power distribution box in the cabinet supply power to the subrack, and the subracks has independent power supply. The air circuit breaker has a rated value of 60 A.

Structure of the OptiX OSN 8800 T64

Subracks are the basic working units of the OptiX OSN 8800 T64. Each subrack has independent power supply.

Figure 2-4 shows the structure of the OptiX OSN 8800 T64 subrack.

Figure 2-4 OptiX OSN 8800 T64 subrack structure

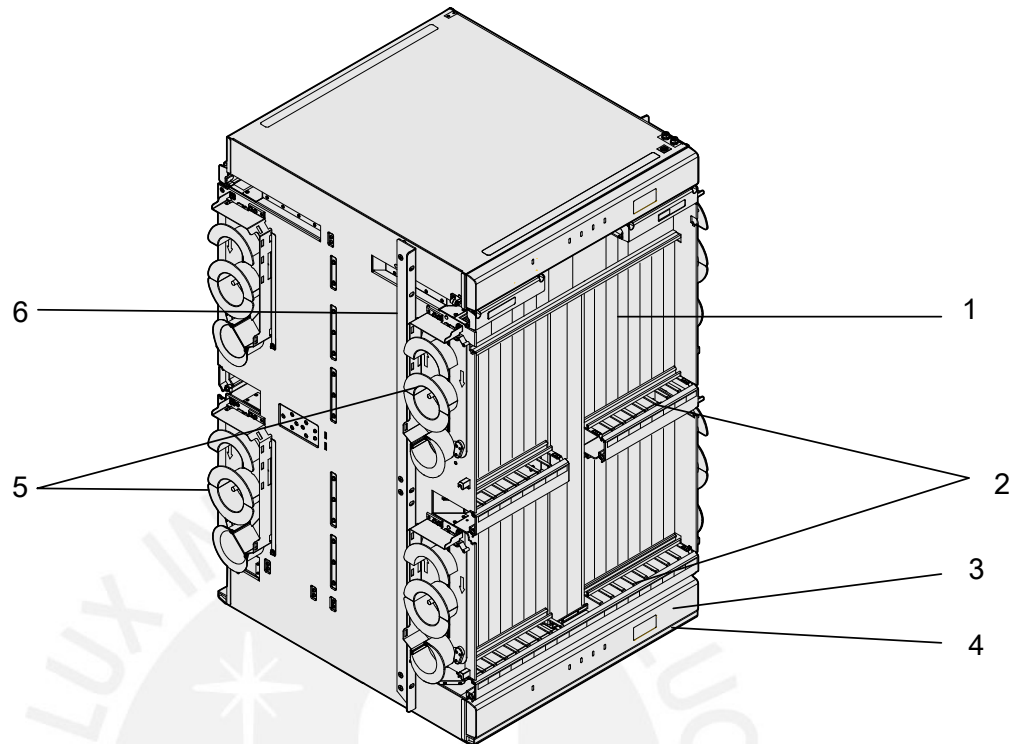

- | | | |
|---------------|-----------------------|----------------------|
| 1. Board area | 2. Fiber cabling area | 3. Fan tray assembly |
| 4. Air filter | 5. Fiber spool | 6. Mounting ear |

- Board area: All the boards are installed in this area. 93 slots are available.
- Fiber cabling area: Fiber jumpers from the ports on the front panel of each board are routed to the fiber cabling area before being routed on a side of the open rack.
- Fan tray assembly: Four fan tray assemblies are available for this subrack. Each fan tray assembly contains three fans that provide ventilation and heat dissipation for the subrack. The front panel of the fan tray assembly has four indicators that indicate fan status and related information.



NOTE

For detailed descriptions of the fan tray assembly, see Subrack Environment Control System (Fan).

- Air filter: It protects the subrack from dust in the air and requires periodic cleaning.
- Fiber spool: Fixed fiber spools are on two sides of the subrack. Extra fibers are coiled in the fiber spool on the open rack side before being routed to another subrack.
- Mounting ears: The mounting ears attach the subrack in the cabinet.

Table 2-3 describes the technical specifications of the 8800 T64 subrack.



NOTE

For the transport equipment, heat consumption and power consumption are similar and can be taken as the same. Heat rate (BTU/h) = Power consumption (W) x Time (h)/0.2931(Wh).

Typical configuration power consumption indicates the average power consumption of the equipment with the typical configuration and the equipment runs at the normal temperature. Maximum power consumption indicates the possible maximum power consumption when the equipment runs in the extreme environment.

Table 2-3 Technical specifications of the OptiX OSN 8800 T64 subrack

Item	Specification
Dimensions	498 mm (W) × 580 mm (D) × 900 mm (H) (19.6 in. (W) × 22.8 in. (D) × 35.4 in. (H))
Weight (empty subrack ^a)	65 kg (143 lb.)
Maximum subrack power consumption ^b	9600 W
Recommended typical configuration power consumption (OTN)	less than 4000 W
Recommended typical configuration power consumption (OCS)	less than 3200 W
Rated working current	200 A (four 50 A switched-mode power supplies)
Nominal working voltage	-48V DC/-60V DC
Working voltage range	-40V DC to -72V DC
<p>a: An empty subrack means no boards are installed in the board area, and no fan tray assembly or air filter is installed.</p> <p>b: The maximum subrack power consumption refers to the maximum power consumption configuration that the subrack can support and the maximum heat dissipation capability of the subracks. In the actual application, the value is much higher than the power consumption of the subrack in typical configuration.</p>	

Table 2-4 describes the power consumption of the subrack in typical configuration in the OptiX OSN 8800 T64.

Table 2-4 Power consumption of the common units in the OptiX OSN 8800 T64

Unit Name		Typical Power Consumption at 25°C (77°F) (W) ^a	Maximum Power Consumption at 55°C (131°F) (W) ^a	Remarks
Subrack	OTU subrack	1804.6	3135.9	It is the power consumed after you install thirty-two LDXes, one SCC, eight PIUs, two AUXes, one EFI1, one EFI2, one ATE and four fan tray assemblies in an OTU subrack.


Unit Name		Typical Power Consumption at 25°C (77°F) (W) ^a	Maximum Power Consumption at 55°C (131°F) (W) ^a	Remarks
	OTU subrack	3569.6	5007.2	It is the power consumed after you install two XCTs, two SXMs, twenty NQ2s, one SCC, eight PIUs, five TOMs, five TQXes, two AUXes, one EF11, one EF12, one ATE and four fan tray assemblies in an OTU subrack.
	OTM subrack	966.2	2175.9	It is the power consumed after you install one M40V, one D40, one OAU1, one OBU1, twelve LDXes, one SCC, one SC2, four PIUs, one AUX, one EF11, one EF12, one ATE and four fan tray assemblies in an OTM subrack.
OCS System		2169.9	-	It is the power consumed after you install two SXMs, twenty SLD64s, eight SLO16s, four SLQ16s, four SLH41s, four EGSHeS, two STGs, one STI, two SCCs, eight PIUs, two AUXes, one EF11, one EF12, one ATE and four fan tray assemblies in an OCS system.
<p>a: Indicates that the power consumption of the subrack and cabinet is the value in a certain configuration. The value is for reference only. The actual power consumed by the chassis and cabinet is a calculation based on the power consumption of each module.</p>				

Structure of the OptiX OSN 8800 T32

Subracks are the basic working units of the OptiX OSN 8800 T32. Each subrack has independent power supply.

Figure 2-5 shows the structure of the OptiX OSN 8800 T32 subrack.

Figure 2-5 OptiX OSN 8800 T32 subrack structure diagram

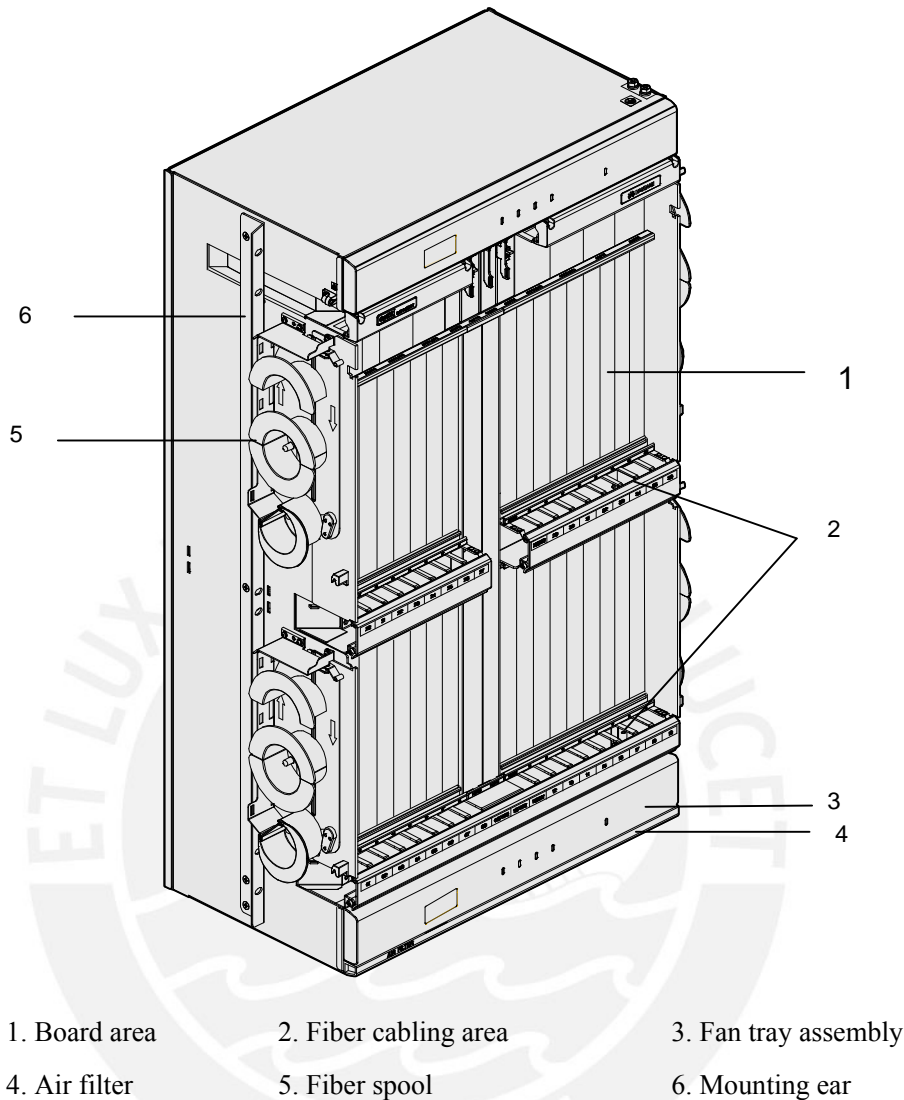

- Board area: All the boards are installed in this area. 50 slots are available.
- Fiber cabling area: Fiber jumpers from the ports on the front panel of each board are routed to the fiber cabling area before being routed on a side of the open rack.
- Fan tray assembly: Fan tray assembly contains three fans that provide ventilation and heat dissipation for the subrack. The front panel of the fan tray assembly has four indicators that indicate fan status and related information.



NOTE

For detailed descriptions of the fan tray assembly, see Subrack Environment Control System (Fan).

- Air filter: It protects the subrack from dust in the air and requires periodic cleaning.
- Fiber spool: Fixed fiber spools are on two sides of the subrack. Extra fibers are coiled in the fiber spool on the open rack side before being routed to another subrack.
- Mounting ears: The mounting ears attach the subrack in the cabinet.

Table 2-5 describes the technical specifications of the OptiX OSN 8800 T32 subrack.



NOTE

For the transport equipment, heat consumption and power consumption are similar and can be taken as the same. Heat rate (BTU/h) = Power consumption (W) x Time (h)/0.2931(Wh).

Typical configuration power consumption indicates the average power consumption of the equipment with the typical configuration and the equipment runs at the normal temperature. Maximum power consumption indicates the possible maximum power consumption when the equipment runs in the extreme environment.

Table 2-5 Technical specifications of the OptiX OSN 8800 T32 subrack

Item	Specification
Dimensions	498 mm (W) × 295 mm (D) × 900 mm (H) (19.6 in. (W) × 11.6 in. (D) × 35.4 in. (H))
Weight (empty subrack ^a)	35 kg (77.1 lb.)
Maximum subrack power consumption ^b	4800 W
Recommended typical configuration power consumption (OTN)	less than 3000 W
Recommended typical configuration power consumption (OCS)	less than 2400 W
Rated working current	100 A (two 50 A switched-mode power supplies)
Nominal working voltage	-48V DC/-60V DC
Working voltage range	-40V DC to -72V DC
<p>a: An empty subrack means no boards are installed in the board area, and no fan tray assembly or air filter is installed.</p> <p>b: The maximum subrack power consumption refers to the maximum power consumption configuration that the subrack can support and the maximum heat dissipation capability of the subrack. In the actual application, the value is much higher than the power consumption of the subrack in typical configuration.</p>	

Table 2-6 describes the power consumption of the subrack in typical configuration in the OptiX OSN 8800 T32.

Table 2-6 Power consumption of the subrack in typical configuration in the OptiX OSN 8800 T32

Unit Name		Typical Power Consumption at 25°C (77°F) (W) ^a	Maximum Power Consumption at 55°C (131°F) (W) ^a	Remarks
Subrack	OTU subrack	1633.4	2408.6	It is the power consumed after you install thirty-two LDXes, one SCC, four PIUs, one AUX, one EFI1, one EFI2, one ATE and two fan tray assemblies in an OTU subrack.
	OTU electrical cross-connection subrack	3158.1	4002.8	It is the power consumed after you install two XCHes, twenty NQ2s, one SCC, four PIUs, five TQXes, five TOMs, one AUX, one EFI1, one EFI2, one ATE and two fan tray assemblies in an OTU electrical cross-connection subrack.
	OTM subrack	795	1448.6	It is the power consumed after you install one M40V, one D40, one OAU1, one OBU1, twelve LDXes, one SCC, four PIUs, one AUX, one EFI1, one EFI2, one ATE and two fan tray assemblies in an OTM subrack.
	OLA subrack	290.3	860	It is the power consumed after you install four OBU1s, four VA1s, one SC2, one SCC, four PIUs, one AUX, one EFI1, one EFI2, one ATE and two fan tray assemblies in an OLA subrack.
	OADM subrack	974	1651.2	It is the power consumed after you install two OAU1s, two MR8Vs, sixteen LDXes, one SC2, one SCC, four PIUs, one AUX, one EFI1, one EFI2, one ATE and two fan tray assemblies in an OADM subrack.


Unit Name		Typical Power Consumption at 25°C (77°F) (W) ^a	Maximum Power Consumption at 55°C (131°F) (W) ^a	Remarks
		380.7	972.5	It is the power consumed after you install two M40Vs, two D40s, two FIUs, one SC2, two RMU9s, two WSM9s, two OAU1s, two OBU1s, one SCC, four PIUs, one AUX, one EFI1, one EFI2, one ATE and two fan tray assemblies in an OADM subrack.
		374.1	465.6	It is the power consumed after you install two M40s, two D40s, two WSMD9s, two DAS1s, one SCC, four PIUs, one AUX, one EFI1, one EFI2, one ATE and two fan tray assemblies in an OADM subrack.
OCS System		1507.4	-	It is the power consumed after you install two XCMs, ten SLQ64s, eight SLO16s, two SLH41s, two EGSHeS, two STGs, one STI, two SCCs, four PIUs, one AUX, one EFI1, one EFI2, one ATE and two fan tray assemblies in an OCS system.
<p>a: Indicates that the power consumption of the subrack and cabinet is the value in a certain configuration. The value is for reference only. The actual power consumed by the chassis and cabinet is a calculation based on the power consumption of each module.</p>				

Slot Distribution of the OptiX OSN 8800 T64

The board area and the interface area of the OptiX OSN 8800 T64 subrack provides 93 slots.

Slots of the OptiX OSN 8800 T64 subrack are shown in [Figure 2-6](#).

Figure 2-6 Slots of the OptiX OSN 8800 T64 subrack

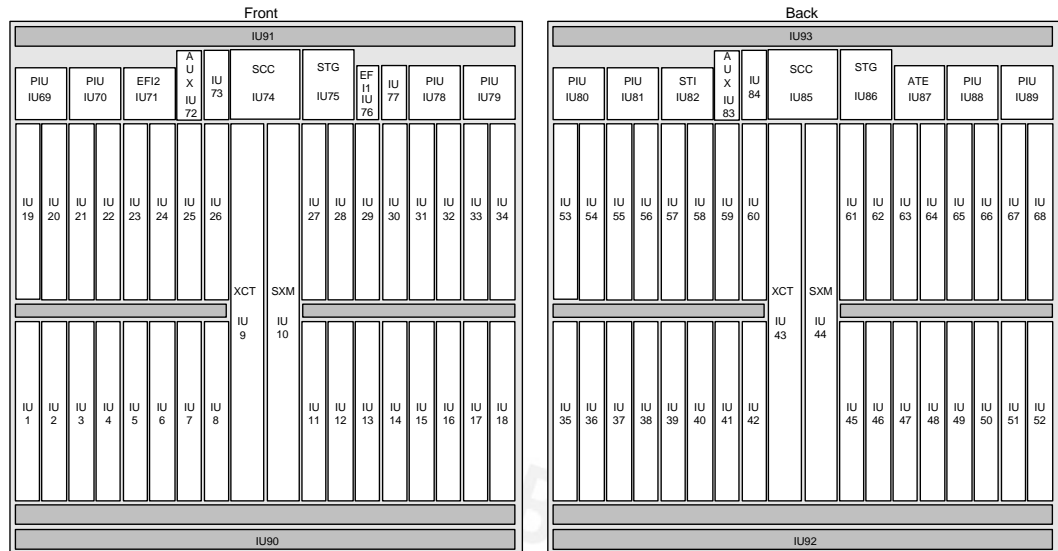


- IU1-IU8, IU11-IU42, and IU45-IU68 are reserved for service boards.
- IU71 is reserved for the EF12.
- IU76 is reserved for the EF11.
- IU87 is reserved for the ATE.
- IU69, IU70, IU78, IU79, IU80, IU81, IU88, and IU89 are reserved for the PIU.
- IU72 and IU83 are reserved for the AUX.
- IU73, IU77 and IU84 are reserved for future use.
- IU75 and IU86 are reserved for the STG.
- IU82 is reserved for the STI.
- IU74 and IU85 are reserved for the SCC.
- IU9 and IU43 are reserved for the XCT.
- IU10 and IU44 are reserved for the SXM or SXH.
- IU90-IU93 are reserved for the fans.

Slot Distribution of the OptiX OSN 8800 T32

The board area and the interface area of the OptiX OSN 8800 T32 subrack provides 50 slots.

Slots of the OptiX OSN 8800 T32 subrack are shown in [Figure 2-7](#).

Figure 2-7 Slots of the OptiX OSN 8800 T32 subrack

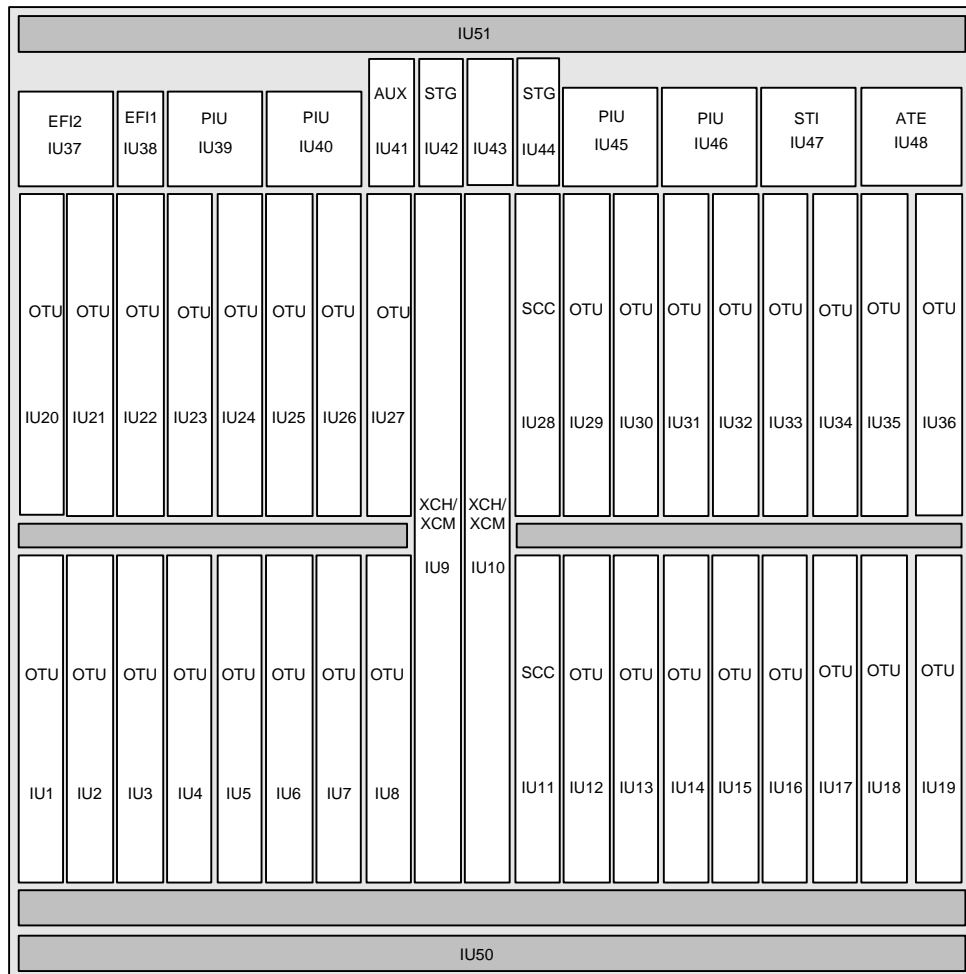

- IU1-IU8, IU12-IU27, and IU29-IU36 are reserved for service boards.
- IU37 is reserved for the EF12.
- IU38 is reserved for the EF11.
- IU48 is reserved for the ATE.
- IU47 is reserved for the STI.
- IU39, IU40, IU45 and IU46 are reserved for the PIU.
- IU41 is reserved for the AUX.
- IU42 and IU44 are reserved for the STG.
- IU43 is reserved for future use.
- IU28 is reserved for the active SCC.
- IU11 is available for the standby SCC or the other boards.
- IU9 and IU10 are reserved for the XCH/XCM.
- IU50 and IU51 are reserved for the fans.

2.2.3 Board

Function Boards

There are many types of functional boards, such as optical transponder boards and optical multiplexer/demultiplexer boards.

The boards can be divided into several functional boards, as shown in [Table 2-7](#).

Table 2-7 Functional boards

Functional boards	Boards
Optical transponder board	LDM, LDMD, LDMS, LDX, LEM24, LEX4, LOG, LOM, LQM, LQMD, LQMS, LSQ, LSXL, LSXLR, LSX, LSXR, LWXS, TMX
Tributary board	TOM, TQX, TDX, TOG, TOA, THA
Line board	NS2, ND2, NS3, NQ2
PID board	NPO2, NPO2E, ENQ2, PQ2
OCS board	BPA, EGSB, SF64A, SLH41, SLO16, SLQ64, SF64, SFD64, SL64, SLD64, SLQ16
Optical multiplexer/demultiplexer board	FIU, D40, D40V, M40, M40V, ITL, SFIU
Fixed optical add and drop multiplexer board	MR8V, CMR2, CMR4, DMR1, SBM2, MR8, MR2, MR4
Reconfigurable optical add and drop multiplexer board	ROAM, RDU9, RMU9, WSD9, WSM9, WSMD2, WSMD4, WSMD9
Optical amplifier board	CRPC, OAU1, OBU1, OBU2, HBA, DAS1
Cross-connect unit and system and communication unit	AUX, SCC, XCH, SXH ^a , SXM ^a , XCT ^a , XCM ^b
Optical supervisory channel (OSC) board	SC1, SC2, HSC1, ST2
Clock board	STG
Optical protection board	DCP, OLP, SCS
Spectrum analyzer board	MCA4, MCA8, WMU, OPM8
Optical power and dispersion equalizing board	DCU, GFU, TDC
Variable optical attenuator board	VA1, VA4
Interface Board	ATE, EFI1, EFI2, STI

Functional boards	Boards
a: Only the OptiX OSN 8800 T64 supports SXH board, SXM board and XCT board. b: Only the OptiX OSN 8800 T32 supports XCM board.	

2.2.4 Small Form-Factor Pluggable (SFP) Module

There are three types of pluggable optical modules: the enhanced small form-factor pluggable (eSFP), the small form-factor pluggable plus (SFP+) and the 10 Gbit/s small form-factor pluggable (XFP). Because they are pluggable, when you need to adjust the type of accessed services or replace a faulty optical module, you can directly replace it without replacing its dominant board.

2.3 Software Architecture

The system software includes the board software, NE software and the network management system.

2.3.1 Overview

The system software is of a modular design. Each module provides specific functions and works with the other modules.


The entire software is distributed in three modules including board software, NE software and NM system.

The system software is designed with a hierarchical structure. Each layer performs specific functions and provides service for the upper layer.

The system software architecture is shown in [Figure 2-8](#).

In the diagram, all the modules are NE software except the "Network Management System" and "Board Software" modules.

Figure 2-8 Software architecture

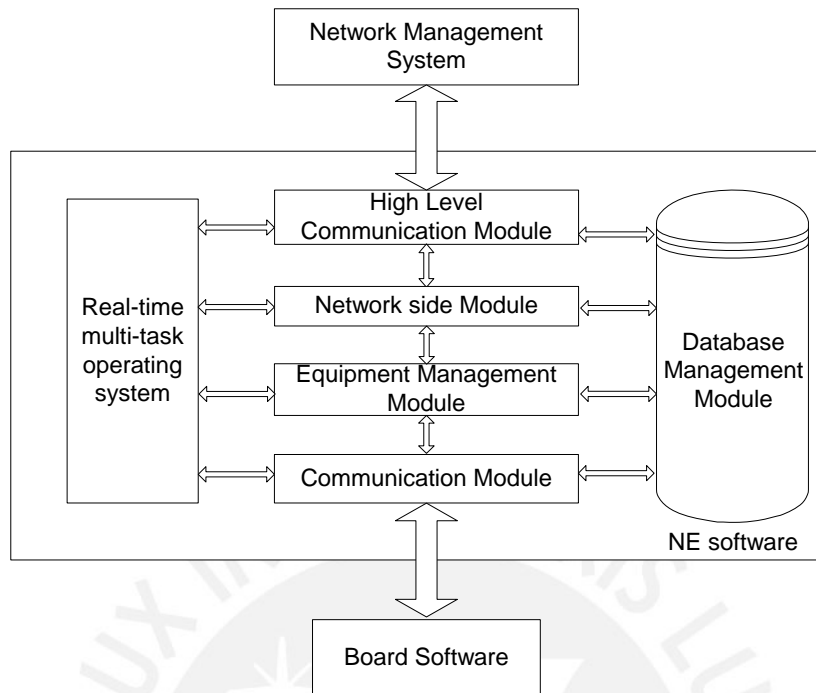

2.3.2 Communication Protocols and Interfaces

The Qx interface is used for communication. Complete protocol stack and messages of the Qx interface are described in ITU-T G.773, Q.811 and Q.812.

The Qx interface is mainly used to connect the mediation device (MD), Q adaptation (QA) and NE (NE) equipment with the operating system (OS) through local communication network (LCN).

At present, QA is provided by the NE management layer. MD and OS are provided by the NM layer. They are connected to each other through the Qx interface.

According to the Recommendations, the Qx interface provided by the system is developed on the basis of TCP/IP connectionless network layer service (CLNS1) protocol stack.

In addition, to support remote access of the NM through Modem, the IP layer uses serial line internet protocol (SLIP).

3

Functions and Features

About This Chapter

3.1 Service Access

The OptiX OSN 8800 T64/8800 T32 supports synchronous digital hierarchy (SDH) service, synchronous optical network (SONET), Ethernet service, storage area network (SAN) service, optical transmission network (OTN) service, video service and others.

3.2 Electrical Layer Grooming

The OptiX OSN 8800 T64/8800 T32 supports the integrated grooming of electrical layer signals.

3.3 Optical Layer Grooming

3.4 Transmission System

3.5 Protection

The OptiX OSN 8800 T32/8800 T64 provides various types of equipment-level protection and network-level protection.

3.6 Data Characteristics

The OptiX OSN 8800 T32/8800 T64 supports the Ethernet features and mainly supports the following Ethernet services: EPL, EVPL (QinQ), and EPLAN.

3.7 Optical Power Management

The optical power management includes IPA, IPA of Raman System, IPA of PID, ALC, APE, EAPE, OPA and AGC.

3.8 WDM Technologies

This chapter describes the WDM technologies and functions implemented on the OptiX OSN 8800 T32/8800 T64.

3.9 Clock Feature

OptiX OSN 8800 T32 and OptiX OSN 8800 T64 support the physical layer clock and PTP clock to realize the synchronization of the clock and the time.

3.10 ASON Management

An automatically switched optical network (ASON) is a new-generation optical transmission network.

3.1 Service Access

The OptiX OSN 8800 T64/8800 T32 supports synchronous digital hierarchy (SDH) service, synchronous optical network (SONET), Ethernet service, storage area network (SAN) service, optical transmission network (OTN) service, video service and others.

3.1.1 Types of Service Access

The OptiX OSN 8800 T64/8800 T32 can access multiple services. Table 3-3 lists the rates of the services that can be accessed by the 8800 T64/8800 T32. Table 3-1 lists the services that can be accessed by the OptiX OSN 8800 T64/8800 T32 used as OCS equipment and Table 3-2 lists the services that can be accessed by the OptiX OSN 8800 T64/8800 T32 used as OTN equipment. The OptiX OSN 8800 T64/8800 T32 supports hybrid application of the OSC equipment and OTN equipment. The SDH boards, OTU boards, and tributary boards can be housed in the same NE.

Table 3-1 Service access types (OCS)

Service Category	Service Type	Reference Standard
SDH	<ul style="list-style-type: none"> SDH standard services: STM-1/STM-4/STM-16/STM-64 SDH standard cascaded services: VC-4-4c/VC-4-16c/VC-4-64c SDH services with FEC: STM-64 	<ul style="list-style-type: none"> ITU-T G.707 ITU-T G.691 ITU-T G.957 ITU-T G.783 ITU-T G.825
Ethernet service	<ul style="list-style-type: none"> GE services 	<ul style="list-style-type: none"> IEEE 802.3u

Table 3-2 Service access types (OTN)

Service Category	Service Type	Reference Standard
SDH/POS/ATM	STM-1, STM-4, STM-16, STM-64, STM-256	ITU-T G.707 ITU-T G.691 ITU-T G.957 ITU-T G.693 ITU-T G.783 ITU-T G.825
SONET	OC-3, OC-12, OC-48, OC-192, OC-768	GR-253-CORE GR-1377-CORE ANSI T1.105

Service Category	Service Type	Reference Standard
Ethernet service	FE, GE, 10GE WAN, 10GE LAN	IEEE 802.3u IEEE 802.3z IEEE 802.3ae
SAN service	ESCON FICON, FICON Express, FC100, FC200, FC400, FC800, FICON 8G, FC1200, FICON 4G ISC 1G, ISC 2G, ETR, CLO InfiniBand 2.5G, InfiniBand 5G	ANSI X3.296 ANSI X3.230 ANSI X3.303 InfiniBand™ Architecture Release 1.2.1
OTN service	OTU1, OTU2, OTU2e, OTU3	ITU-T G.709 ITU-T G.959.1
Video service and others	HD-SDI	SMPTE 292M
	DVB-ASI	EN 50083-9
	SDI	SMPTE 259M
	FDDI	ISO 9314
	3G-SDI	SMPTE 424M
<p>FE: fast Ethernet GE: gigabit Ethernet ESCON: enterprise systems connection FICON: fiber connection FC: fiber channel HD-SDI: bit-serial digital interface for high-definition television systems DVB-ASI: digital video broadcasting-asynchronous serial interface SDI: serial digital interface FDDI: fiber distributed data interface 3G-SDI: 3G-serial digital interface</p> <p>NOTE As specified in the SMPTE-259M, SDI is also called SD-SDI.</p>		

Table 3-3 Service type and service rate

Service Category	Service Type	Service Rate
SDH/POS/ATM	STM-1	155.52 Mbit/s
	STM-4	622.08 Mbit/s
	STM-16	2.5 Gbit/s
	STM-64	9.95 Gbit/s

Service Category	Service Type	Service Rate
	STM-256	39.81 Gbit/s
SONET	OC-3	155.52 Mbit/s
	OC-12	622.08 Mbit/s
	OC-48	2.5 Gbit/s
	OC-192	9.95 Gbit/s
	OC-768	39.81 Gbit/s
Ethernet service	FE	125 Mbit/s
	GE	1.25 Gbit/s
	10GE WAN	9.95 Gbit/s
	10GE LAN	10.31 Gbit/s
SAN service	ESCON	200 Mbit/s
	FICON	1.06 Gbit/s
	FICON Express	2.12 Gbit/s
	FC100	1.06 Gbit/s
	FC200	2.12 Gbit/s
	FC400	4.25 Gbit/s
	FC800	8.5 Gbit/s
	FC1200	10.51 Gbit/s
	FICON4G	4.25 Gbit/s
	ISC 1G	1.06 Gbit/s
	ISC 2G	2.12 Gbit/s
	ETR	16 Mbit/s
	CLO	16 Mbit/s
	InfiniBand 2.5G	2.5 Gbit/s
InfiniBand 5G	5 Gbit/s	
OTN service	OTU1	2.67 Gbit/s
	OTU2	10.71 Gbit/s
	OTU2e	11.10 Gbit/s
	OTU3	43.02 Gbit/s
Video service and others	HD-SDI	1.485 Gbit/s
	DVB-ASI	270 Mbit/s

Service Category	Service Type	Service Rate
	SDI	270 Mbit/s
	FDDI	125 Mbit/s
	3G-SDI	2.97 Gbit/s

- When the SDH/SONET signals are accessed, the SDH/SONET signals are processed at the electrical layer and are encapsulated in OTN frames. In the process of mapping/demapping, the clock signals can be transparently transmitted without degrade.
- When the GE/10GE signals are accessed, the GE/10GE signals are transparently transmitted in compliance with ITU-T G.8261 and ITU-T G.8262.
- Multiple channels of FE/GE signals can be transparently mapped and multiplexed to 2.5 Gbit/s or 10 Gbit/s signals. The 10GE LAN signals can be transparently mapped to OTU2 signals. When synchronous Ethernet is configured, the system does not perform electrical regeneration. At the sink end, the system recovers the signal frequency when demapping the signals. In this manner, the synchronous transmission performance is ensured.
- The jitter and wander specifications of the SDH/SONET and Ethernet interfaces comply with ITU-T G.82, ITU-T G.8251, IEEE 802.3 2005, and IEEE 802.3.

3.1.2 Capability of Service Access

Table 3-4 lists the capability of service access when the OptiX OSN 8800 T64/8800 T32 functions as the equipment in the OCS system. Table 3-5 lists the capability of service access when the OptiX OSN 8800 T64/8800 T32 functions as the equipment in the OTN system.

Table 3-4 Capability of service access in the OCS system

Service Type	Maximum of Service Amount for a Board	Maximum of Service Amount for an 8800 T32 Subrack	Maximum of Service Amount for an 8800 T64 Subrack
STM-1	16	512	1024
STM-4	16	512	1024
STM-16	8	256	512
STM-64	4	128	256
GE	16	512	1024

Table 3-5 Capability of service access in the OTN system

Service Type	Maximum of Service Amount for a Board	Maximum of Service Amount for an 8800 T32 Subrack	Maximum of Service Amount for an 8800 T64 Subrack
FE	22	448	896
GE	22	336	672
10GE LAN	4	64	128
10GE WAN	4	64	128
STM-256/OC-768	1	16	32
STM-64/OC-192	4	64	128
STM-16/OC-48	16	256	512
STM-4/OC-12	16	400	816
STM-1/OC-3	16	448	896
OTU1	16	256	512
OTU2/OTU2e	4	64	128
OTU3	1	16	32
ESCON	16	448	896
FC100/FICON	16	336	672
FC200/FICON Express/InfiniBand 2.5G	16	336	672
FC400/FICON4G/InfiniBand 5G	2	64	128
FC800/FICON 8G	1	100	204
FC1200	1	32	64
ISC 1G	8	256	512
ISC 2G	4	128	256
ETR/CLO	8	128	256
HD-SDI	8	256	512
FDDI	8	256	512
DVB-ASI/SDI	16	448	896
3G-SDI	8	256	512

3.2 Electrical Layer Grooming

The OptiX OSN 8800 T64/8800 T32 supports the integrated grooming of electrical layer signals.

The OptiX OSN 8800 T64 supports integrated grooming of ODU0/ODU1/ODU2/ODU3 signals by the XCT and SXM board. It supports a maximum of 2.56 Tbit/s cross-connect capacity of ODU0/ODU1/ODU2/ODU3 signals.

The OptiX OSN 8800 T64 supports integrated grooming of ODU0/ODU1/ODU2/ODU3 signals by the XCT and SXH board. It supports a maximum of 2.56 Tbit/s cross-connect capacity of ODU0/ODU1/ODU2/ODU3 signals.

The OptiX OSN 8800 T32 supports integrated grooming of ODU0/ODU1/ODU2/ODU3 signals by the XCH board. It supports a maximum of 1.28 Tbit/s cross-connect capacity of ODU0/ODU1/ODU2/ODU3 signals.

3.2.1 OTN Centralized Grooming

The OptiX OSN 8800 T32 provides cross-connect boards to achieve centralized cross-connections and supports full cross-connections between slots IU1-IU8, IU12-IU27, IU29-IU36 with a cross-connect capacity of 40 Gbit/s for each slot. The equipment has a cross-connect capacity of 1.28 Tbit/s. The equipment supports centralized cross-connections of ODU0, ODU1, ODU2, and ODU3 signals.

The OptiX OSN 8800 T64 provides cross-connect boards to achieve centralized cross-connections and supports full cross-connections between slots IU1-IU8, IU11-IU42, IU45-IU68 with a cross-connect capacity of 40 Gbit/s for each slot. The equipment has a cross-connect capacity of 2.56 Tbit/s. The equipment supports centralized cross-connections of ODU0, ODU1, ODU2, and ODU3 signals.

Centralized Grooming

Table 3-6 lists the services supported by the tributary board and the line board centralized grooming.

Table 3-6 Services supported by the tributary board and the line board centralized grooming

Board	Centralized Grooming
TN52ND2	ODU0 signals, ODU1 signals, ODU2/ODU2e signals
TN52NS2	ODU0 signals, ODU1 signals, ODU2/ODU2e signals
TN52NS3	ODU0 signals, ODU1 signals, ODU2/ODU2e signals
TN54NS3	ODU0 signals, ODU1 signals, ODU2/ODU2e signals, ODU3 signals
TN55NS3	ODU0 signals, ODU1 signals, ODU2/ODU2e signals, ODU3 signals
TN52NQ2 TN54NQ2	ODU0 signals, ODU1 signals, ODU2/ODU2e signals


Board	Centralized Grooming
TN52TDX	ODU2/ODU2e signals
TN52TQX TN53TQX	ODU2/ODU2e signals
TN52TOM	ODU0 signals, ODU1 signals
TN54TOA	ODU0 signals, ODU1 signals
TN54THA	ODU0 signals, ODU1 signals
TN52TOG	ODU0 signals
TN53TSXL	ODU3 signals

Application of Electrical-Layer Grooming

Three types of typical application are supported by electrical grooming, for detail, see [Figure 3-1](#).

- Passing through on the client side: The services are input from a client-side port of the local station and are output through another client-side port. This is, the services are not transmitted through the fiber line.
- Adding and dropping on the client side: The services of the other stations are transmitted through the fiber to a WDM-side port of the local station, and then are output through a client-side port, or the client services are input from the local station and are transmitted to the other station through the fiber.
- Passing through on the line side: The services are not added or dropped at the local station. The local station functions as a regeneration station and sends the services from one side of the fiber line to the other side.

Figure 3-1 Application of electrical-layer grooming

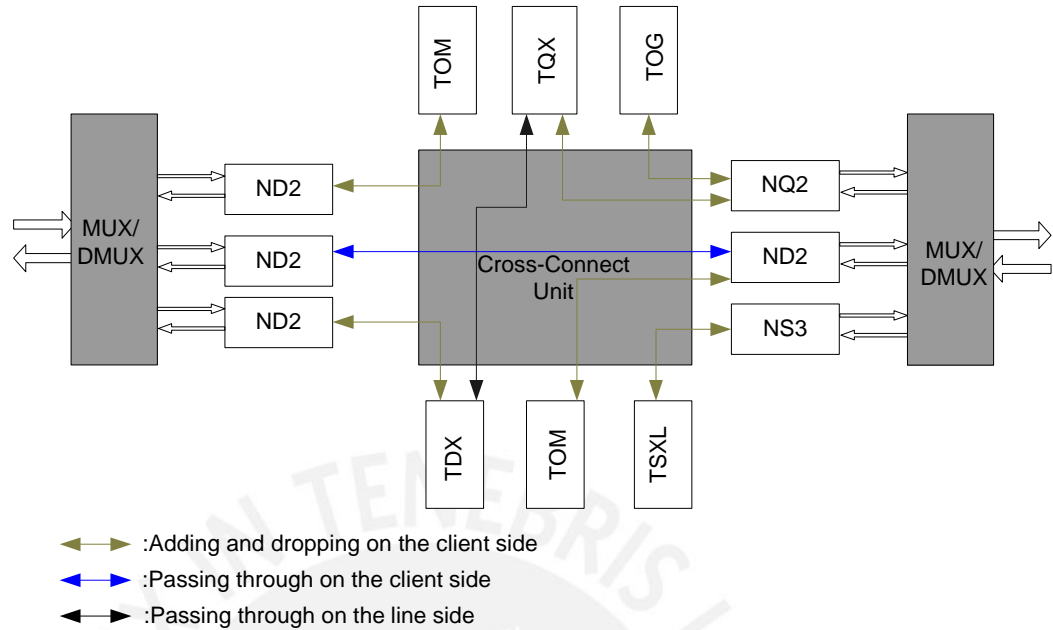

3.2.2 OCS Centralized Grooming

When the OptiX OSN 8800 T32 used as an OCS device, it can realize full cross-connection among the 32 slots of IU1-IU8, IU12-IU27 and IU29-IU36 with the XCM board. It supports a maximum of 1.28 Tbit/s grooming of VC-4 or 80 Gbit/s grooming of VC-3/VC-12 signals.

When the OptiX OSN 8800 T64 used as an OCS device, it can realize full cross-connection among the 64 slots of IU1-IU8, IU11-IU42 and IU45-IU68 with the SXM board. It supports a maximum of 1.28 Tbit/s grooming of VC-4 or 80 Gbit/s grooming of VC-3/VC-12 signals.

Table 3-7 lists the services supported by the SDH service processing boards centralized grooming.

Table 3-7 Services supported by the SDH service processing boards centralized grooming

Board	Centralized Grooming
EGSH	VC-12 signals VC-3 signals VC-4 signals
SF64A	VC-12 signals VC-3 signals VC-4 signals
SF64	VC-12 signals VC-3 signals VC-4 signals

Board	Centralized Grooming
SFD64	VC-12 signals VC-3 signals VC-4 signals
SL64	VC-12 signals VC-3 signals VC-4 signals
SLD64	VC-12 signals VC-3 signals VC-4 signals
SLH41	VC-12 signals VC-3 signals VC-4 signals
SLO16	VC-12 signals VC-3 signals VC-4 signals
SLQ16	VC-12 signals VC-3 signals VC-4 signals
SLQ64	VC-12 signals VC-3 signals VC-4 signals


Application of Electrical Layer Grooming

The following three types of typical application are supported by electrical grooming.

- Passing through on the client side: The services are input from a client-side port of the local station and are output through another client-side port. This is, the services are not transmitted through the fiber line.
- Adding and dropping on the client side: The services of the other stations are transmitted through the fiber to a WDM-side port of the local station, and then are output through a client-side port, or the client services are input from the local station and are transmitted to the other stations through the fiber.
- Passing through on the line side: The services are not added or dropped at the local station. The local station functions as a regeneration station and sends the services from one side of the fiber line to the other side.

The application of electrical layer grooming is shown in [Figure 3-2](#).

Figure 3-2 Application of electrical layer grooming

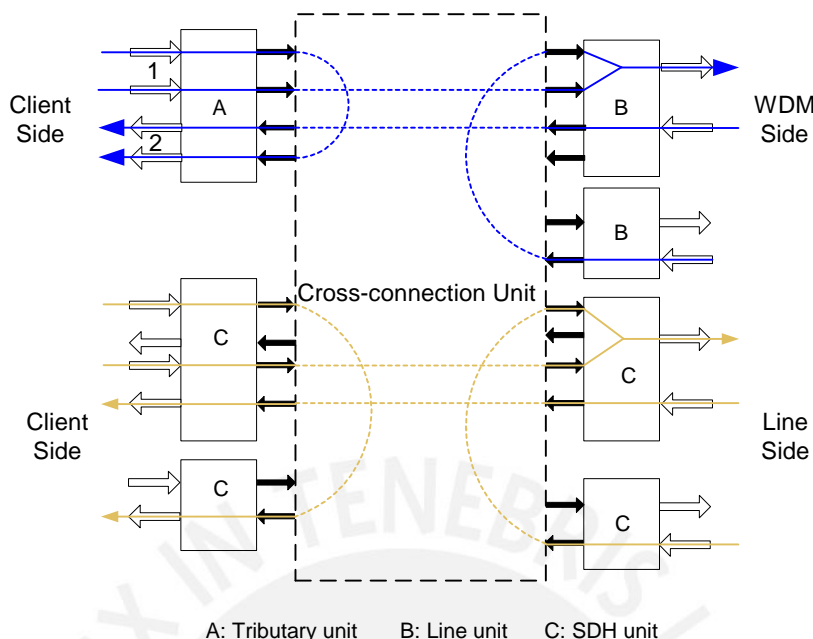

3.3 Optical Layer Grooming

Distribution solutions of medium wavelength resource of WDM equipment are as follows:

- Fixed optical add/drop multiplexer (FOADM)
- Reconfigurable optical add/drop multiplexer (ROADM)

The FOADM solution cannot adjust the distribution of wavelength resource according to the service development.

The ROADM solution realizes reconfiguration of wavelengths by blocking or cross-connecting of wavelengths. This ensures that the static distribution of the wavelength resource is flexible and dynamic. ROADM with U2000 can remotely and dynamically adjust the status of wavelength adding/dropping and passing through. A maximum of 80 wavelengths can be adjusted.

In the case where one link, fiber or dimension fails in the ROADM solution, other links, fibers and dimensions remain unaffected. This is attributed to three factors: gain locking of optical amplifiers, service separation and wavelength blocking of the ROADM solution.

The ROADM solution has the following advantages:

3.4 Transmission System

3.4.1 40G Transmission System

The system provides 40/80 x 40G transmission solution which meets operators' requirements for large capacity and high performance.

The system supports tunable C-band, tunable dispersion compensation, hybrid transmission of signals at the rates of 2.5 Gbit/s, 10 Gbit/s and 40 Gbit/s, and grooming from ODU_x to ODU_y. The system has a clock tolerance up to ± 20 ppm. The client-side interfaces for 40 Gbit/s signals comply with the ITU-T Recommendations: G.693. VSR 2000 3R2, G.693. VSR 2000 3R3, and G.693. VSR 2000 3R5.

Optical amplifiers adopt the gain locking mode to ensure that the optical power of each channel is maintained while new wavelengths are added. Therefore, the system can be upgraded to its utmost capacity without interrupting services. Note that 40 Gbit/s signals are quite different from 2.5 Gbit/s and 10 Gbit/s signals in the requirements on OSNR, residual dispersion and optical power. At the early stage of networking, pay special consideration to the requirements of the 40 Gbit/s signals for a smooth upgrade.

Basic Concept

The system provides the 40/80 channels x 40G, meeting operators' requirements for large capacity and high performance of the network.

- 40/80 channels x 40G transmission solution

The 40G transmission system directly accesses signals from the 40G OTU board based on the existing system platform, which meets operators' requirements for expanding transmission capacity and configuring high performance of the optical network. This system achieves seamless expansion of the transmission capacity on a 40G basis without affecting the existing low rate services. The capacity expansion cost is reduced by utilizing the existing investment. The 40G transmission system is mainly characterized by the following features:

- Supports the hybrid transmission of C-band 40/80 channels x 40G/10G.
- Accesses 1 x 40G (STM-256/OC-768/OTU3) service on the client side of the 40G OTU.
- Supports DQPSK and ODB modulation on the WDM side of the 40G OTU. Provides an advanced modulation format to ensure that the optical spectrum can pass the existing filter (10G Optical Multiplexer and Demultiplexer Board maintained).
- In the case of ODB modulation, the system supports a maximum of 640 km transmission without regeneration.
- In the case of DQPSK modulation, the system supports a maximum of 640 km transmission without regeneration.
- Supports smooth upgrade from the 10G DWDM system to the 40G DWDM system through the plug-and-play mode without interrupting existing services.

Function Implementation

- 40/80 channels x 40G transmission solution


The 40G OTU provides optical interfaces of tunable wavelength on the WDM side to output G.694.1-compliant wavelengths. With fiber jumpers, the output signals of the 40G OTU can be directly accessed into a multiplexer/demultiplexer unit. In addition, the system supports simultaneous access of 2.5 Gbit/s, 10 Gbit/s and 40 Gbit/s signals. The system supports the transmission of a maximum of 80 channels of the 40 Gbit/s signals.

Application

- 40/80 channels x 40G transmission solution

[Figure 3-3](#) shows an example of the typical application of the 40G transmission solution with the 40 channels x 40G system.

Figure 3-3 Typical application of 40 channels x 40G system

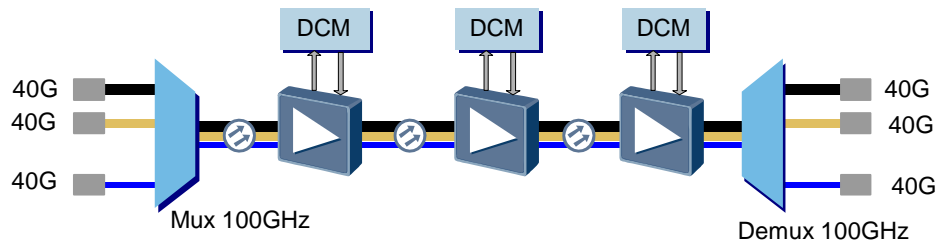


The 40G transmission system of the OptiX OSN 8800 provides flexible hardware/software interfaces for the WDM solution. The 40 Gbit/s OTU and the 10 Gbit/s OTU adopt the same EDFA, dispersion compensation module and multiplexer/demultiplexer unit. The 40 Gbit/s services can be added/dropped at OTMs and OADMs/ROADMs and are managed by the same NM system as the 2.5 Gbit/s and 10 Gbit/s services.

3.4.2 Hybrid Transmission of 40G and 10G Signals

With the emergence of service requirements, the existing 10G WDM transmission system may be gradually upgraded to the 10G transmission system. When this occurs, the hybrid transmission of the 40G and 10G signals becomes very important. The OptiX OSN 8800 T64/8800 T32 supports hybrid transmission of the 40G and 10G signals, and ensures the smooth upgrade from the 10G system to the 40G system.

The new and upgraded 40G wavelengths with the existing 10G wavelengths can be sent to the same multiplexing unit and transmitted over the same fiber. The hybrid transmission does not affect the existing and new services. Figure 3-4 shows the typical application of the hybrid transmission of 40G and 10G signals.

Figure 3-4 Hybrid transmission of 40G and 10G signals

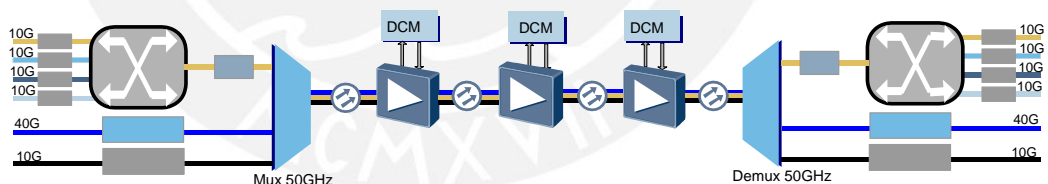

3.4.3 Transmission Distance

- For 40 Gbit/s rate in the 40-wavelength system, a maximum of 20 x 22 dB transmission without electrical regenerator is supported.
- For 40 Gbit/s rate in the 80-wavelength system, a maximum of 18 x 22 dB transmission without electrical regenerator is supported.
- For 10 Gbit/s rate in the 40-wavelength system, a maximum of 32 x 22 dB transmission without electrical regenerator is supported.
- For 10 Gbit/s rate in the 80-wavelength system, a maximum of 25 x 22 dB transmission without electrical regenerator is supported.
- For 2.5 Gbit/s rate, a maximum of 25 x 22 dB transmission without electrical regenerator is supported.

- For 10 Gbit/s rate system, supports a maximum of 1 x 82 dB single-span ultra long-distance transmission.
- For the CWDM systems, a maximum of 80 km transmission distance is supported.

Huawei OSN series WDM equipment supports various links or spans based on different modulation schemes for systems with diversified channel spacing.

Table 3-8 2.5 Gbit/s system span

Channel Spacing	Modulation Scheme	22 dB Span
100 GHz	NRZ	25 x 22 dB

Table 3-9 10 Gbit/s system span

Channel Spacing	Modulation Scheme	22 dB Span
100 GHz	DRZ	32 x 22 dB
	NRZ	27 x 22 dB
	NRZ (XFP)	27 x 22 dB
50 GHz	DRZ	25 x 22 dB
	NRZ	22 x 22 dB
	NRZ (XFP)	22 x 22 dB

Table 3-10 40 Gbit/s system span

Channel Spacing	Modulation Scheme	22 dB Span
100 GHz	DQPSK	20 x 22 dB
50 GHz	ODB	8 x 22 dB
	DQPSK	18 x 22 dB

3.5 Protection

The OptiX OSN 8800 T32/8800 T64 provides various types of equipment-level protection and network-level protection.

3.5.1 Equipment Level Protection

The OptiX OSN 8800 T32 and OptiX OSN 8800 T64 provide cross-connect board 1+1 protection, SCC board 1+1 protection, STG board 1+1 protection, inter-subrack

communication protection, DC input protection, redundancy protection for fans and redundancy protection for optical and performance monitoring boards.

Cross-Connect Board 1+1 Protection

The cross-connect board adopts 1+1 backup. It is recommended that active and standby cross-connect boards be of the same type.

Service boards receive signals and process overheads. Then, the boards transmit the signals to the active and the standby cross-connect boards. The active and the standby cross-connect boards send the data after cross-connection to service boards. Service boards select the data from the cross-connect boards. Configuration of the active cross-connect board is the same as the configuration of the standby cross-connect board. The two boards are independent of each other. Forcible switching can be performed between the two cross-connection boards without affecting the existing services.

The cross matrix of the active cross-connect board is the same the cross matrix of the standby cross-connect board. When the standby cross-connect board receives information about abnormal active cross-connect board or when the NM system issues a switching command, the standby cross-connect board takes over the work from the active cross-connect board, sets itself to be in working status, and reports a switching event.

There are two types of switching for the 1+1 protection switching of cross-connect boards:

- Automatic switching
When the service boards detect the abnormal status of cross-connect boards or buses, a switching is performed automatically. The switching does not need to be performed manually.
- Manual switching
When a switching is required in a test during the normal running of the active and the standby cross-connect boards, the switching can be performed manually.



NOTE

When a switching occurs between the cross-connect boards, a switching also occurs between the active and standby clock boards.

SCC Board 1+1 Protection

The SCC adopts 1+1 backup.

The service boards receive signals and process overheads. Then, the boards transmit the overheads to both the active and the standby SCCs. The active and the standby SCCs send the data after overhead processing to service boards. The service boards select the data according to the status of SCCs. Configuration of the active SCC is the same as the configuration of the standby SCC. The two boards are independent of each other.

The communication between SCCs and other boards is performed mainly through Ethernet. When the status is normal, the data on service boards and the standby SCC is from the active SCC. There is no inter-board communication between the standby SCC and service boards. Only when the standby SCC is in the working mode, it has inter-board communication with other boards.

When the active SCC is in normal status, the standby SCC is in backup status. When the standby SCC receives information about abnormal active SCC or when the NM system issues a switching command, the standby SCC takes over the work from the active SCC, sets itself to be in working status, and reports a switching event.

There are two types of switching for the 1+1 protection switching of SCCs:

- Automatic switching
The SCC detects its own status through hardware or software. If it is in the abnormal status, a switching is performed automatically. The switching is performed by the board and no manual operation is required.
- Manual switching
When a switching is required in a test during the normal running of the active and the standby SCCs, the switching can be performed manually.

STG Board 1+1 Protection

The clock board STG adopts 1+1 backup. The two STGs serve as mutual backups. When both of them are normal, one of them functions as the active board, and the other functions as the standby board. Service boards select the clock source according to the status of the two STGs. When the active STG is faulty, an active/standby switching occurs. Then, the standby STG becomes active, and the services boards select the clock from the current active STG according to the status of the two STGs.

Configuration of the active STG is the same as the configuration of the standby STG. The two boards are independent of each other. When the active clock board is in abnormal state, the standby clock board automatically takes over the work. Hence, there is no impact on the normal operation of the equipment.

There are two types of switching for the 1+1 protection switching of STGs:

- Automatic switching
The STG detects its own status through hardware or software. If it is in the abnormal status, a switching is performed automatically. The switching is performed by the board and no manual operation is required.
- Manual switching
When a switching is required in a test during the normal running of the active and the standby STGs, the switching can be performed manually.



NOTE

When a switching occurs between the clock boards, a switching also occurs between the active and standby cross-connect boards.

DC Input Protection

The power supply system supports four -48 V/-60 V DC power inputs for mutual backup in OptiX OSN 8800 T32 subrack. The power supply system adopts the switched-mode power supply mode for two areas, that is, the blue-slot area and the yellow-slot area, as shown in [Figure 3-5](#). Each area is configured with a pair of power supplies of mutual backup: one pair is IU39 and IU45, and the other pair is IU40 and IU46. The normal operation of the equipment is not affected in the case of failure of any external input -48 V/-60V power supply. [Figure 3-5](#) shows the two pairs of power supplies of mutual backup.

The power supply system supports eight -48 V/-60 V DC power inputs for mutual backup in OptiX OSN 8800 T64 subrack. The subrack adopts switched-mode power supply scheme for four areas which are shown in [Figure 3-6](#). The area has the same color is defined as one area. Each area is configured with a pair of power supplies in mutual backup: IU69 and IU78, IU70 and IU79, IU80 and IU88, and IU81 and IU89. The normal operation of the equipment is not affected in the case of failure of any external input -48 V/-60V power supply. [Figure 3-6](#) shows the four pairs of power supplies of mutual backup.

Figure 3-5 Power distribution and supply in 8800 T32 subrack


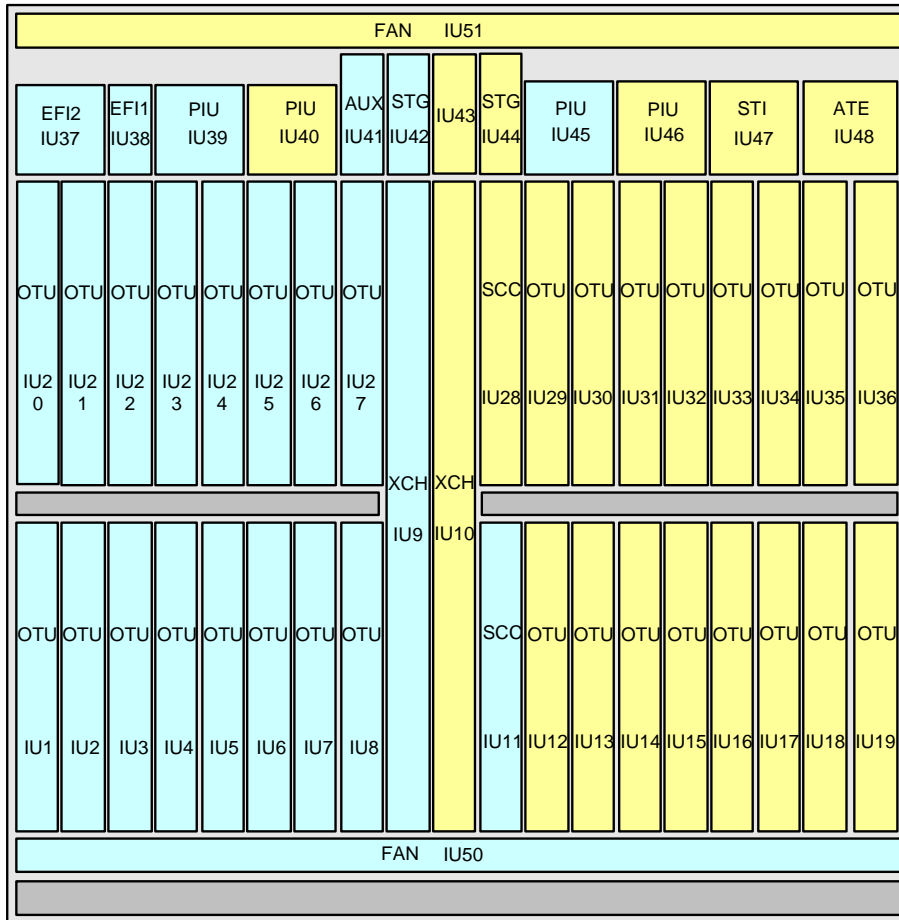


Figure 3-6 Power distribution and supply in 8800 T64 subrack

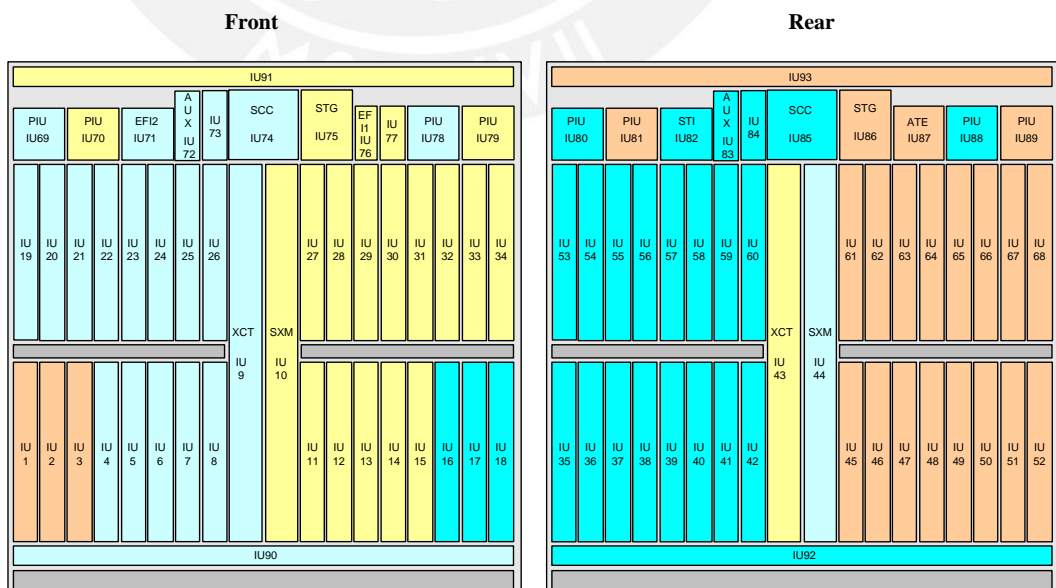

Redundancy Protection for Fans

In the OptiX OSN 8800 T32 system, each subrack has two fan areas. In the OptiX OSN 8800 T64 system, each subrack has four fan areas. And each fan area has three fans for heat dissipation. The speed of each fan can be adjusted independently and the failure of any fan does not affect the other fans.

Inter-Subrack Communication Protection

Subracks of an NE can be cascaded in various modes. When subracks are cascaded to form a ring, the NE provides working and protection Ethernet communication channels for communication between the master and slave subracks. In this case, when the working channel is faulty, services are switched to the protection channel, achieving protection for inter-subrack communication.

3.5.2 Network Level Protection

The security and survivability of a network can be further enhanced through an automatic switched optical network (ASON), which is generally referred to as intelligent optical network.

As a main networking mode of ASON, mesh features high flexibility and scalability. On a mesh network, to make the interrupted services available, you can immediately restore the services through the rerouting mechanism in addition to the traditional protection scheme such as 1+1 protection and shared protection scheme such as ODUk SPRing. That is, the mesh network can support traditional protection schemes, dynamic restoration of services, and service restoration mechanisms in case of protection failures. In this manner, services are not interrupted if the resources are available.

WDM Protection

The OptiX OSN 8800 T32/8800 T64 provides various types of WDM protection, as listed in [Table 3-11](#).

For principles of the protections, refer to the *Feature Description*.

Table 3-11 WDM protection

Category	Sub-Category	Description
Optical line protection	Optical line protection	It uses the dual fed and selective receiving function of the OLP board to protect line fibers between adjacent stations by using diverse routing.
Optical channel protection	Client-side 1+1 protection	It uses the dual fed and selective receiving function of the OLP/DCP/SCS board to protect the OTU and the OCh fibers.
	Intra-board 1+1 protection	It uses the dual fed and selective receiving function of the OTU/OLP/DCP board to protect the OCh fibers by using diverse routing.
SNCP	SW SNCP Protection	The intra-board cross-connections on the TOM board implement the dual fed and selective receiving function. In this manner, the SW SNCP protection protects the OCh fiber.

Category	Sub-Category	Description
	ODUk SNCP protection	It uses the dual fed and selective receiving function of the electrical layer grooming to protect the line board and the OCh fibers. The cross-connect granularity is ODU0 signals, ODU1 signals, ODU2 signals and ODU3 signals.
	Tributary SNCP	Protects the tributary service by using the dual-fed and selectively-receiving function at the electrical cross-connect layer. The cross-connect granularity is ODU0 signals, ODU1 signals, ODU2 signals and ODU3 signals.
	VLAN SNCP protection	Uses the dual-fed selective receiving function of a L2 module to protect Ethernet services. The protection granularity is the service with VLAN.
ODUk SPRing protection	ODUk SPRing protection	It applies to the ring network with distributed services. This protection uses two different ODU1 or ODU2 channels to achieve the protection of multiple services between all stations.
OWSP	OWSP	It applies to the ring networks. This protection uses two different wavelengths to achieve the protection of one wavelength of service between all stations.
ASON protection	Optical-layer ASON	Protects services of OCh wavelength level.
	Electrical-layer ASON	Protects services of ODUk wavelength level.

SDH Protection

The OptiX OSN 8800 T32/8800 T64 provides various types of SDH protection, as listed in [Table 3-12](#).

For details on the working principle of each type of protection, see the *Feature Description*.

Table 3-12 Service protection classifications

Category	Subcategory	Description
Linear MSP	1+1 linear MSP	It realizes dual transmitting and selective receiving by using two fibers. In this manner, it provides protection for the services on the link.
	1:N (N ≤ 14) linear MSP	It protects services by providing one protection fiber for N working fibers.

Category	Subcategory	Description
MSP Ring	Two-fiber bidirectional MSP ring	In this protection mode, half of the capacity of the fibers in each transmission direction is assigned to the service channel, and the other half of the capacity is assigned for the protection channel. The service timeslot and protection timeslot in each direction are transmitted over the same fiber. That is, the service signals and protection signals are transmitted at the same time over the same fiber.
	Four-fiber bidirectional MSP ring	In this protection mode, two fibers are used in the transmit and protection directions. One of the fibers in each direction is used to transmit the working service, and the other fiber is used to transmit the protection service.
Transoceanic MSP Ring	A transoceanic MSP ring can be a two-fiber bidirectional MS shared protection ring or a four-fiber bidirectional MS shared protection ring. When the network fails, the ring path is switched between the source and sink nodes of the service rather than on two adjacent nodes of the failed node to avoid multiple transoceanic events of the services, which increase the delay of transmission in the long-haul transmission network (for example, the marine system).	
SNCP	In this protection mode, the service protection is implemented by means of dual transmitting and selective receiving. That is, the services are dual transmitted at the source but selectively received at the sink.	
Sub-network connection tunnel protection (SNCTP)	The SNCTP provides the protection path at the VC-4 level. When the working path is faulty, all its services are switched to the protection path.	
Ethernet protection	Ethernet ring protection	This protection type is based on the traditional Ethernet mechanism and uses the Ethernet operation, administration, and maintenance (OAM) function and ring network automatic protection switching (R-APS) protocol to realize quick protection switching in the Ethernet ring network.
	LCAS	This protection type dynamically adjusts the number of virtual containers required for service mapping to provide protection for virtually concatenated services.
	LAG	In this protection mode, multiple links that are connected to the same equipment are bundled together to increase the bandwidth and improve link reliability.

Category	Subcategory	Description
	STP/RSTP	When the STP or RSTP is started, it logically modifies the network topology to avoid a broadcast storm. The STP or RSTP realizes link protection by restructuring the topology.
	MSTP	In the case of the Ethernet user network where loops exist, the MSTP generates the tree topology according to VLAN IDs of the Ethernet packets. Thus, the broadcast storm is avoided and the network traffic is balanced according to the VLAN IDs of the Ethernet packets.
	DLAG	The distributed link aggregation group (DLAG) is a board-level port protection technology used to detect unidirectional fiber cuts and to negotiate with the opposite end. In the case of a link down failure on a port or a hardware failure on a board, the services can automatically be switched to the slave board, thus realizing 1+1 protection for the inter-board ports.
ASON protection	Protects services of STM-N, VC-4, VC-3.	

Data Protection

The OptiX OSN 8800 T32/8800 T64 provides various types of data protection, as listed in [Table 3-13](#).

For details on the working principle of each type of protection, see the *Feature Description*.

Table 3-13 Data protection

Protection	Description
DBPS protection	DBPS protection works with Ethernet ring protection to protect the links between Ethernet boards and BRAS, and also protect services at 10GE and GE ports on Ethernet boards.
Ethernet ring protection	Based on the traditional Ethernet mechanism and APS protocol specific to a ring network, Ethernet ring protection achieves fast protection switching of an Ethernet ring network.
LAG	An LAG binds multiple links on the same equipment, increasing the bandwidth and improving link reliability.
STP and RSTP	When the STP or RSTP is running, it modifies the logical network topology to avoid a broadcast storm. The RSTP can achieve link protection by restructuring the network topology.

Protection	Description
MSTP	In the case of a user Ethernet network with a loop, MSTP can generate a tree topology by VLAN IDs of Ethernet packets to avoid a broadcast storm, and can also achieve load sharing by VLAN IDs of user packets.
LPT	The link state pass through (LPT) is used to detect and report the faults that occur at the service access node and in the intermediate transmission network. The LPT notifies the equipment at two ends in the transmission network of starting the backup network at the earliest time for communication, thus making sure the normal transmission of the important data.
MPLS Tunnel	An MPLS tunnel is the tunnel defined in the MPLS protocol. Independent of services, an MPLS tunnel achieves end-to-end service transmission and carries service-related PWs.

3.6 Data Characteristics

The OptiX OSN 8800 T32/8800 T64 supports the Ethernet features and mainly supports the following Ethernet services: EPL, EVPL (QinQ), and EPLAN.

3.6.1 OAM

The OptiX OSN 8800 T32/8800 T64 provides rich OAM functions to monitor services, detect faults, and identify faults at each service layer.

ETH-OAM

ETH-OAM improves the Ethernet Layer 2 maintenance method and provides powerful maintenance functions for service connectivity verification, deployment commissioning, and network fault location.

The ETH-OAM is a protocol based on the MAC layer. It checks Ethernet links by transmitting OAM protocol packets. The protocol is independent from the transmission medium. The OAM packets are processed only at the MAC layer, having no impact on other layers on the Ethernet. In addition, as a low-rate protocol, the ETH-OAM protocol occupies low bandwidth. Therefore, this protocol does not affect services carried on the link.

Comparison between ETH-OAM and the maintenance and fault locating method on the existing network:

- The current frame test method is based on only the encapsulation format where the same type of data is contained. This test method is not applicable to other encapsulation formats (such as GFP encapsulation format and HDLC encapsulation format) where different types of data is contained.
- The current port loopback function focuses on all packets at the port. The loopback cannot be performed for a specific service selectively.
- ETH-OAM can detect hardware faults.
- ETH-OAM can detect and locate faults automatically.

Huawei Ethernet service processing boards realize the ETH-OAM function that complies with IEEE 802.1ag and IEEE 802.3ah. The combination of IEEE 802.1ag and IEEE 802.3ah provides a complete Ethernet OAM solution.

The IEEE 802.1ag OAM function can be achieved through the continuity test, loopback test, link trace test, and OAM_Ping test.

- The link trace (LT) test is used to locate the faulty point.
- The loopback (LB) is used to test the link state bidirectionally.
- The continuity check (CC) is used to test the link state unidirectionally.
- The OMA_Ping test is used to test the in-service packet loss ratio and hold-off time.

IEEE 802.3ah OAM is realized through the OAM auto-discovery, link performance detection, fault locating, remote loopback, self-loop test, and loop port shutdown.

- The OAM auto-discovery is used to check whether the opposite end supports the IEEE 802.3ah OAM protocol.
- The link performance monitoring is used to monitor the BER performance.
- The fault detection is used to detect faults and inform the opposite end of the detected faults.
- The remote loopback is used to locate fault test the link performance.
- The self-loop test is used to test the self-loop ports.
- The loop port shutdown is used to block self-loop ports to solve the port loop problems.

RMON

Remote monitoring (RMON) is intended to monitor performance of Ethernet ports (ports and VCTRUNK) and collect performance data for fault detection and performance reporting.

RMON supports Ethernet statistics groups and history Ethernet groups as follows:

- Ethernet statistics group: supports real-time statistics and query of packet length and packet status at an Ethernet port.
- History Ethernet group: supports statistics and query of history performance data such as packet length and packet status at an Ethernet port. This enables a user to query the history statistics data at an Ethernet port in a given period.

Test Frame

Test frames are data packets used to test connectivity of a network that carries Ethernet services. Test frames are mainly used to commission Ethernet services during deployment and identify faults of Ethernet services.

Test frames can be encapsulated in two formats. The test frames on interconnected boards must be encapsulated in the same format.

- Ethernet packet: Ethernet packet format. After constructing packets, the CPU sends the packets along the same path as ordinary Ethernet packets.
- GFP packets: GFP management frame format. The packets are sent along the same path as GFP management frames.

3.7 Optical Power Management

The optical power management includes IPA, IPA of Raman System, IPA of PID, ALC, APE, EAPE, OPA and AGC.

With the IPA, IPA of Raman System, IPA of PID, ALC, APE, EAPE, OPA and AGC functions, the WDM equipment of Huawei OSN series provides optical power equalization of all channels, groups of channels and a particular channel.

3.8 WDM Technologies

This chapter describes the WDM technologies and functions implemented on the OptiX OSN 8800 T32/8800 T64.

3.8.1 DWDM and CWDM Technical Specifications

The OptiX OSN 8800 T32/8800 T64 supports two wavelength division multiplexing technologies: dense wavelength division multiplexing (DWDM) and coarse wavelength division multiplexing (CWDM) technologies. This section describes the technical specifications and transmission capacity of the product using the two technologies.

There are no limits for wavelengths transmitted over G.652, G.654, and G.655 fibers used with the OptiX OSN 8800 T32/OptiX OSN 8800 T64. To realize 40-wavelength transmission, the wavelengths transmitted over G.653 fiber should be within 196.05 THz to 194.1 THz.

- DWDM includes 40-wavelength system and 80-wavelength system. The wavelengths are in the C band compliant with ITU-T G.694.1.
 - 40-wavelength DWDM with a channel spacing of 100 GHz can access up to 40 wavelengths. It applies to services of 2.5 Gbit/s, 10 Gbit/s and 40 Gbit/s.
 - 80-wavelength DWDM with a channel spacing of 50 GHz can access up to 80 wavelengths. It applies to services of 10 Gbit/s and 40 Gbit/s.
 - The 40-wavelength system can be upgraded to the 80-wavelength system smoothly.
- CWDM with a channel spacing of 20 nm can access up to eight wavelengths. It only applies to services rated at 2.5 Gbit/s. The wavelengths are in the C band compliant with ITU-T G.694.2.

DWDM wavelengths can be transported in the window of CWDM 1531 nm to 1551 nm to expand the CWDM system capacity. [Figure 3-7](#) shows the expansion of wavelength allocation. With this expansion scheme, a CWDM system can transmit a maximum of 26 wavelengths at 100 GHz or 50 wavelengths at 50 GHz.

Figure 3-7 DWDM wavelength expansion and allocation in the CWDM system


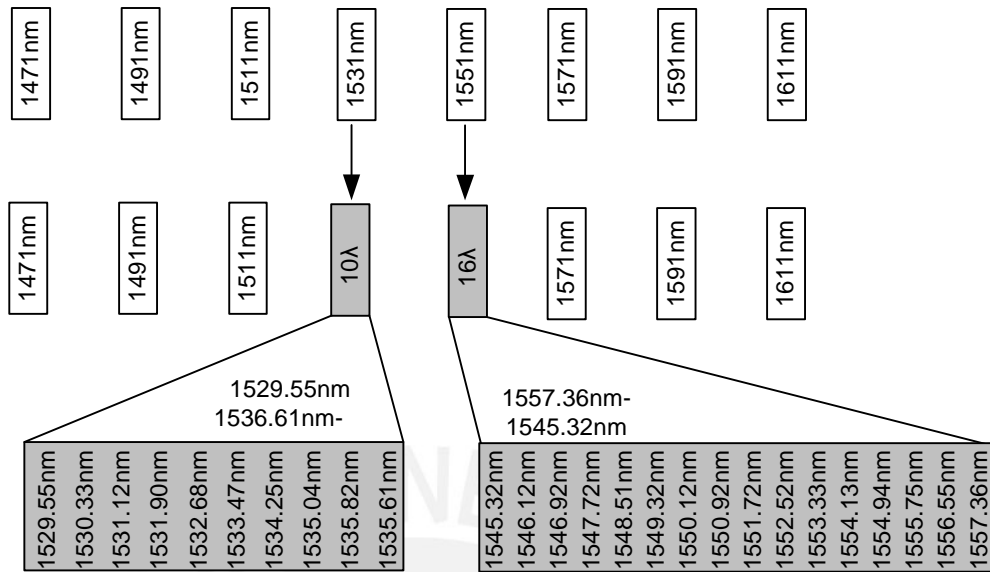


Figure 3-8 shows the equipment configuration in which DWDM wavelengths are transported in the window of CWDM 1531 nm to 1551 nm. The DWDM wavelengths need to pass through the DWDM MUX/DEMUX and CWDM MUX/DEMUX. Hence, the optical amplifier unit needs to be configured in between.

Figure 3-8 Application of the DWDM wavelength in the CWDM system

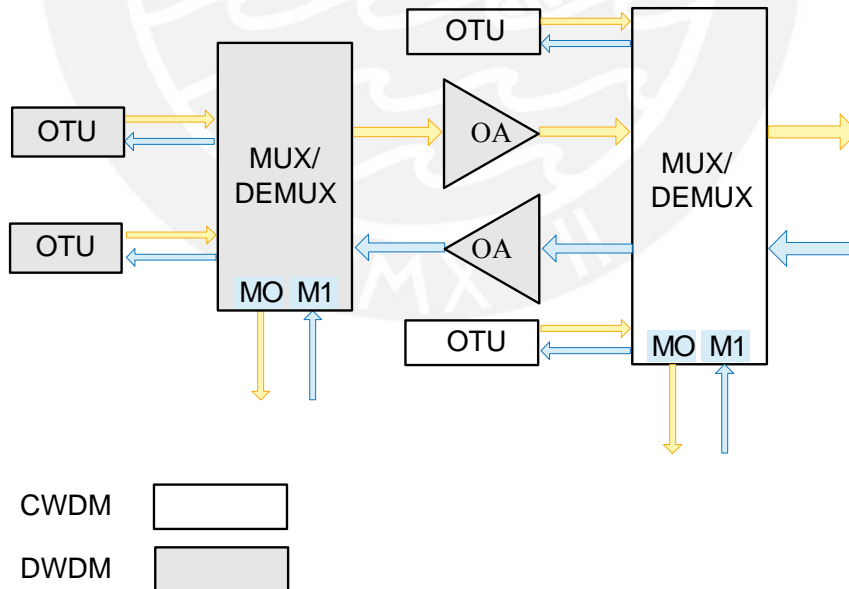

3.8.2 Nominal Central Wavelength and Frequency of the DWDM System

Table 3-14 Wavelengths and frequencies of a C-band 80-channel (spacing of 50 GHz) system

Wave length No.	Central Frequency (THz)	Central Wavelength (nm)	Wave length No.	Central Frequency (THz)	Central Wavelength (nm)
1	196.05	1529.16	41	194.05	1544.92
2	196.00	1529.55	42	194.00	1545.32
3	195.95	1529.94	43	193.95	1545.72
4	195.90	1530.33	44	193.90	1546.12
5	195.85	1530.72	45	193.85	1546.52
6	195.80	1531.12	46	193.80	1546.92
7	195.75	1531.51	47	193.75	1547.32
8	195.70	1531.90	48	193.70	1547.72
9	195.65	1532.29	49	193.65	1548.11
10	195.60	1532.68	50	193.60	1548.51
11	195.55	1533.07	51	193.55	1548.91
12	195.50	1533.47	52	193.50	1549.32
13	195.45	1533.86	53	193.45	1549.72
14	195.40	1534.25	54	193.40	1550.12
15	195.35	1534.64	55	193.35	1550.52
16	195.30	1535.04	56	193.30	1550.92
17	195.25	1535.43	57	193.25	1551.32
18	195.20	1535.82	58	193.20	1551.72
19	195.15	1536.22	59	193.15	1552.12
20	195.10	1536.61	60	193.10	1552.52
21	195.05	1537.00	61	193.05	1552.93
22	195.00	1537.40	62	193.00	1553.33
23	194.95	1537.79	63	192.95	1553.73
24	194.90	1538.19	64	192.90	1554.13
25	194.85	1538.58	65	192.85	1554.54
26	194.80	1538.98	66	192.80	1554.94

Wavelength No.	Central Frequency (THz)	Central Wavelength (nm)	Wavelength No.	Central Frequency (THz)	Central Wavelength (nm)
27	194.75	1539.37	67	192.75	1555.34
28	194.70	1539.77	68	192.70	1555.75
29	194.65	1540.16	69	192.65	1556.15
30	194.60	1540.56	70	192.60	1556.55
31	194.55	1540.95	71	192.55	1556.96
32	194.50	1541.35	72	192.50	1557.36
33	194.45	1541.75	73	192.45	1557.77
34	194.40	1542.14	74	192.40	1558.17
35	194.35	1542.54	75	192.35	1558.58
36	194.30	1542.94	76	192.30	1558.98
37	194.25	1543.33	77	192.25	1559.39
38	194.20	1543.73	78	192.20	1559.79
39	194.15	1544.13	79	192.15	1560.20
40	194.10	1544.53	80	192.10	1560.61

3.8.3 Nominal Central Wavelengths of the CWDM System

Table 3-15 Nominal central wavelengths of the CWDM system

Wavelength No.	Wavelength (nm)	Wavelength No.	Wavelength (nm)
11	1471	15	1551
12	1491	16	1571
13	1511	17	1591
14	1531	18	1611

3.8.4 PID Technology

The photonics integrated device (PID) technology is used to integrate multiple wavelengths on one chip which greatly increases the integration of equipment. For details, refer to the *Feature Description*.


PID Implemented Based on NPO2 and ENQ2 Boards

One NPO2 board and one ENQ2 board form a 12-channel PID group or one NPO2 board forms an 8-channel PID group, as shown [Figure 3-9](#). An ENQ2 board can work only with an NPO2 board to convert 32 x ODU0, 16 x ODU1, or 4 x ODU2e signals into 4 x OTU2/OTU2e signals. An NPO2 board converts 64 x ODU0, 32 x ODU1, 8 x ODU2, or 8 x ODU2e signals into 8 x OTU2/OTU2e signals, and can also receive 4 x OTU2/OTU2e signals from an ENQ2 board. In this manner, an NPO2 board can integrate 12 or 8 channels. One PID group can work as a line unit.

NOTE

The NPO2 board has two versions: TN54 and TN55. A TN55NPO2 board can process eight channels of signals when working with a TN54PQ2 board or process four channels of signals when working without a TN54PQ2 board. A TN54NPO2 board can process eight channels of signals in whatever cases.


Figure 3-9 PID implemented based on NPO2 and ENQ2 boards

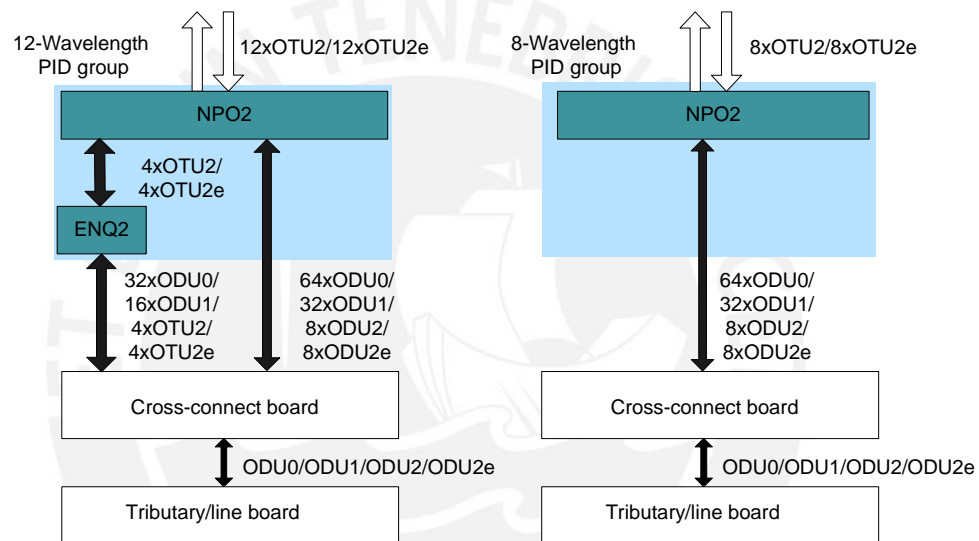

The slots housing the ENQ2 and NPO2 boards are fixed. A cross-connect board can cross-connect ODU0, ODU1, ODU2, or ODU2e signals between PID groups, and it can cross-connect a maximum of 120 Gbit/s signals.


One OptiX OSN 8800 T32 subrack can house a maximum of eight PID groups and each PID group has a maximum capacity of 120 Gbit/s. The slot groups for the eight PID groups are slots IU1-IU3, IU5-IU7, IU12-IU14, IU16-IU18, IU20-IU22, IU24-IU26, IU29-IU31, and IU33-IU35. [Figure 3-10](#) shows the details.

Figure 3-10 Slots for PID groups on an OptiX OSN 8800 T32 subrack

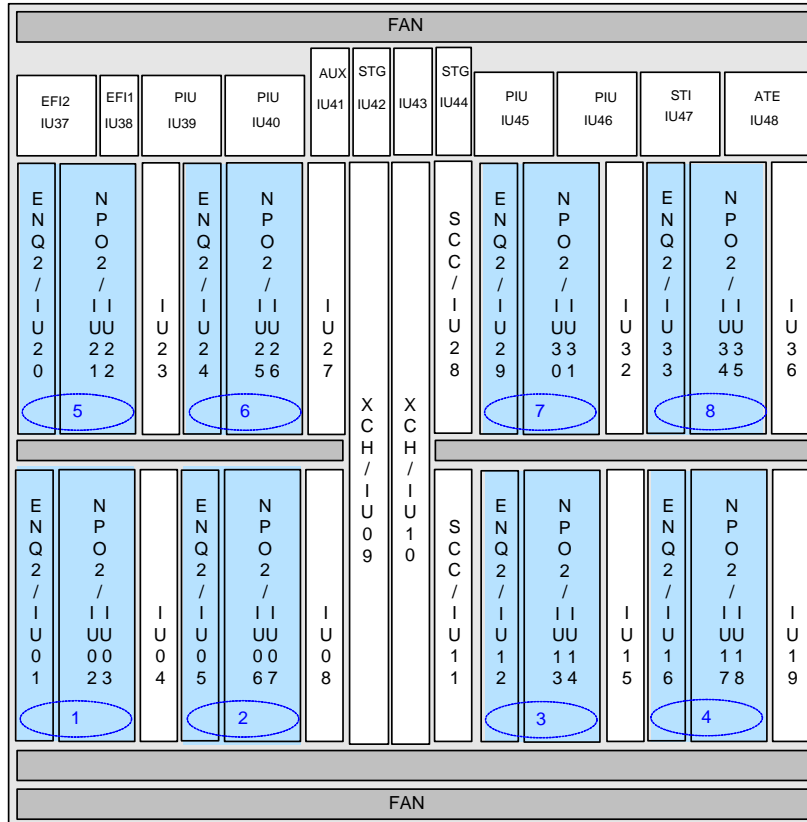

One OptiX OSN 8800 T64 subrack can house a maximum of 16 PID groups and each PID group has a maximum capacity of 120 Gbit/s. The slot groups for the 16 PID groups are slots IU1-IU3, IU5-IU7, IU11-IU13, IU15-IU17, IU19-IU21, IU23-IU25, IU27-IU29, IU31-IU33, IU35-IU37, IU39-IU41, IU45-IU47, IU49-IU51, IU53-IU55, IU57-IU59, IU61-IU63, and IU65-IU67. Figure 3-11 shows the details.

Figure 3-11 Slots for PID groups on an OptiX OSN 8800 T64 subrack

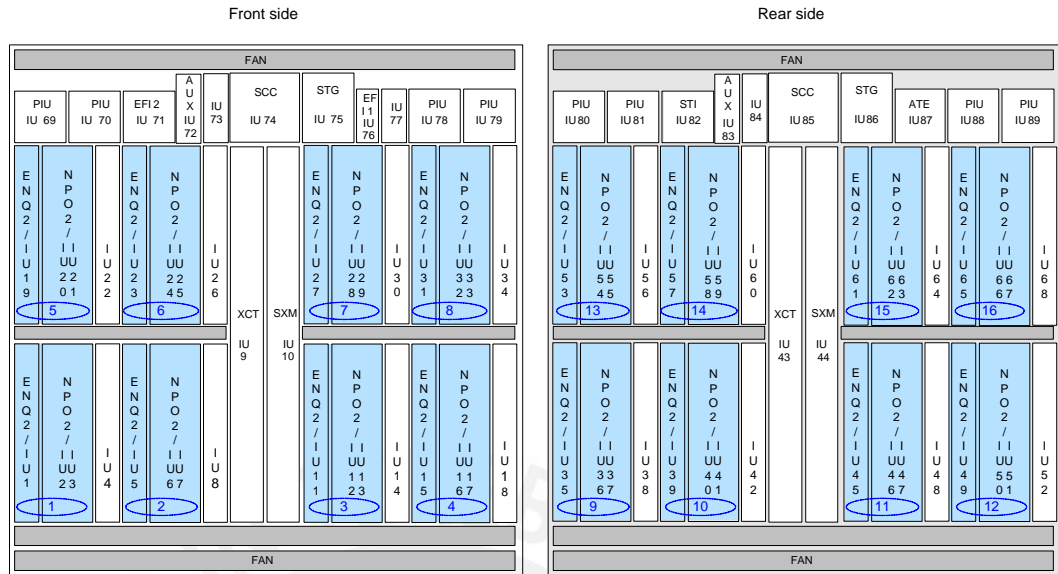

An OptiX OSN 8800 subrack supports 80-channel PID boards. One PID group must use combination of fixed wavelengths, as shown in Table 3-16. For mappings between wavelength numbers, wavelengths, and frequencies, see 3.8.2 Nominal Central Wavelength and Frequency of the DWDM System in the Product Description.

Table 3-16 Wavelength assignment table of a PID group (NPO2+ENQ2)

Serial No.	Type of NPO2 (Used with ENQ2)	Wavelength No. of NPO2	Wavelength No. of ENQ2
1	TN54NPO201/TN55NPO2 S01	1, 5, 9, 13, 17, 21, 25, 29	33, 37, 41, 45
2	TN54NPO202/TN55NPO2 S02/TN55NPO2L02	2, 6, 10, 14, 18, 22, 26, 30	34, 38, 42, 46
3	TN54NPO203/TN55NPO2 S03	3, 7, 11, 15, 19, 23, 27, 31	35, 39, 43, 47
4	TN54NPO204/TN55NPO2 S04/TN55NPO2L04	4, 8, 12, 16, 20, 24, 28, 32	36, 40, 44, 48
5	TN54NPO205/TN55NPO2 S05	49, 53, 57, 61, 65, 69, 73, 77	-
6	TN54NPO206/TN55NPO2 S06	50, 54, 58, 62, 66, 70, 74, 78	-
7	TN54NPO207/TN55NPO2 S07	51, 55, 59, 63, 67, 71, 75, 79	-
8	TN54NPO208/TN55NPO2 S08	52, 56, 60, 64, 68, 72, 76, 80	-

**NOTE**

In the case of the wavelength groups indicated by serial numbers 5-8, only one NPO2 board is required. The ENQ2 board should be housed on the left of the NPO2 board.

Unlike the TN54NPO2, the TN55NPO2S supports DCM-free transmission over short distance and the TN55NPO2L supports DCM-free transmission over long distance.

The TN55NPO2 can process four wavelengths. After being equipped with the TN54PQ2 service processing sub-board, it can process four more wavelengths. For example, the TN55NPO2S01 can process only the 1st, 5th, 9th, and 13th wavelengths. However, when it is equipped with the TN54PQ2 service processing sub-board, it can also process the 17th, 21st, 25th, and 29th wavelengths.

3.9 Clock Feature

OptiX OSN 8800 T32 and OptiX OSN 8800 T64 support the physical layer clock and PTP clock to realize the synchronization of the clock and the time.

The physical clock extracts the clock from the serial bit stream at the physical layer to realize the synchronization of the frequency.

The Precision Time Protocol (PTP) clock complies with the IEEE 1588 v2 protocol. IEEE 1588 v2 is a synchronization protocol, which realizes time synchronization based on the timestamp generated during the exchanging of protocol packets. It provides the nanosecond accuracy to meet the requirements of 3G base stations.

3.9.1 Physical Clock

OptiX OSN 8800 T32 and OptiX OSN 8800 T64 support the physical clock synchronization. Physical-layer synchronization is classified into the SDH/PDH synchronization in the traditional SDH field and synchronous Ethernet.

OptiX OSN 8800 T32 and OptiX OSN 8800 T64 extract the timing signals by the following methods:

- Extracts 2M/1.5M timing signals from the external clock interface of an NE.
- Extracts timing signals from optical signals that the line board receives.
- Pick-up clock signals from the line side of SDH unit.

OptiX OSN 8800 T32 and OptiX OSN 8800 T64 extract input and output of two 75-ohm or two 120-ohm external clock sources.

OptiX OSN 8800 T32 and OptiX OSN 8800 T64 extract three clock working modes, that is, the tracing, holdover, and free-run modes. The timing signals from optical signals that 1.5 Mbit/s timing signals, 2 Mbit/s timing signals and the line board receives also process and transfer synchronization status messages (SSM).

- Tracing mode: It is the normal working mode. In this mode, the local clock is synchronized with the input reference clock signals. An ASON NE not only supports the traditional clock tracing mode, but also supports the ASON clock tracing mode.
- Holdover mode: When all timing reference signals are lost, the clock enters into the holdover mode. In this mode, the clock takes timing reference from the last frequency information saved before the loss of timing reference signals. This mode can be used to cope with an interruption of external timing signals.
- Free-run mode: When all timing reference signals are lost and the clock loses the saved configuration data about the timing reference, the clock starts tracing the internal oscillator of the NE.

The synchronization process of the physical clock is as follows:

- The clock processing module of each NE extracts the clock signals from the serial bit stream on the line and selects a clock source.
- The clock phase-locked loop traces one of the line clocks and generates the system clock.
- The system clock is used as the transmit clock on the physical layer. It is transferred to the downstream.

The synchronous physical clock has the following features:

- The synchronous physical clock is easy to realize and is highly reliable.
- The synchronous physical clock adopts the synchronization status information (SSM) to indicate clock quality and exclusive OAM packets to transfer the SSM.

3.9.2 PTP Clock (IEEE 1588 v2)

A Precision Time Protocol (PTP) clock complies with the IEEE 1588 v2 protocol and can realize synchronization of frequency and time.

IEEE 1588 v2 is a synchronization protocol, which realizes frequency and time synchronization based on the timestamp generated during the exchange of protocol packets. It provides the nanosecond accuracy to meet the requirements of 3G base stations.



NOTE

To achieve PTP clock synchronization, all NEs on the clock link should support the IEEE 1588 v2 protocol.

BMC Algorithm

For the PTP clock, the best master clock (BMC) algorithm is adopted to select the clock source.

The best master clock (BMC) algorithm compares data describing two or more clocks to determine which data describes the better clock, and selects the better clock as the clock source. The BMC algorithm includes the following algorithms:

- Data set comparison algorithm: The NE determines which of the clocks is better, and selects the better clock as the clock source. If an NE receives two or more channels of clock signals from the same grandmaster clock (GMC), the NE selects one channel of the clock signals that traverses the least number of nodes as the clock source.
- State decision algorithm: The state decision algorithm determines the next state of the port based on the results of the data set comparison algorithm.

Clock Architecture

There are three models for the IEEE 1588 v2 clock architecture.

- OC (Ordinary Clock): A clock that has a single IEEE 1588 v2 port and the clock needs to be restored. It may serve as a source of time (master clock), or may synchronize to another clock (slave clock).
- BC (Boundary Clock): A clock that has multiple IEEE 1588 v2 ports and the clock needs to be restored. It may serve as the source of time, (master clock), and may synchronize to another clock (slave clock).

- TC (Transparent Clock): A device that measures the time taken for a PTP event message to transit the device and provides this information to clocks receiving this PTP event message. That is, the clock device functions as an intermediate clock device to transparently transmit the clock and process the delay, but does not restore the clock. It can effectively deal with the accumulated error effects resulting from the master and slave hierarchical architecture. In this manner, the TC ensures that the clock/time synchronization precision meets the application requirement.

The TC is classified into peer-to-peer (P2P) TC and end-to-end (E2E) TC according to the delay processing mechanism.

- P2P TC: When the PTP packets are transmitted to the P2P TC, the P2P TC corrects both the residence time of the PTP packets and the transmission delay of the link connected to the receive port. The P2P TC is mainly used in the MESH networking.
- E2E TC: When the PTP packets are transmitted to the E2E TC, the E2E TC corrects only the residence time of the PTP packets. The E2E delay computation mechanism between the master and slave clocks is adopted. The intermediate nodes do not process the transmission delay but transparently transmit the PTP packets. The E2E TC is mainly used in the chain networking.

OptiX OSN 8800 T32 and OptiX OSN 8800 T64 can support the OC, BC, TC, TC+OC, BC + physical-layer clock, and TC+BC at present.

3.10 ASON Management

An automatically switched optical network (ASON) is a new-generation optical transmission network.

With integration of SONET/SDH functionality, effective IP technology, large-capacity WDM/OTN, and revolutionary network control software, ASON lays a foundation for flexible and scalable next generation optical networks, which are easy to operate and manage, and less expensive to operate.

Introducing ASON into WDM networks brings the following benefits:

- High reliability: Protection and restoration together improve network reliability and service security.
- Easy to use: Network resources and topologies are easy to discover and end-to-end services can be quickly created.
- Easy to manage: Trail resources are manageable and predictable, and services can be automatically reverted to their original trails.
- Investment saving: A mesh network ensures higher resource usage and enables quick expansion (plug-and-play).
- New service types: Service level agreement (SLA) ensures differentiated services.


WDM/OTN equipment is an effective service carrier. However, only the capability of carrying services (on the transport plane) does not qualify WDM/OTN equipment as advanced and future-oriented equipment, which also requires outstanding performance in bandwidth usage, flexibility, manageability, maintainability, reliability, and protection capability. It has become a trend to implement a control plane over the transport plane of the WDM/OTN equipment.

The limitations on the WDM/OTN equipment are removed after the ASON technology is implemented on the WDM/OTN equipment. Because of the ASON technology, the WDM/OTN equipment features high reliability, flexibility, bandwidth utilization,

maintainability, and manageability and supports different service levels and quick deployment of services. Further, the operability of a WDM/OTN network is highly improved because of the features supported by the ASON technology, such as automatic discovery of resources, traffic engineering, dynamic bandwidth adjustment, and interconnection and communication technologies.

In addition, the OptiX OSN 8800 is also capable of cross-connecting services at the SDH layer. Therefore, WDM ASON equipment can be networked with WDM ASON equipment or SDH ASON equipment to enable cross-connections at multiple granularities and multiple layers, as shown in Figure 3-12.

Figure 3-12 Flexible networking and multi-layer service cross-connections

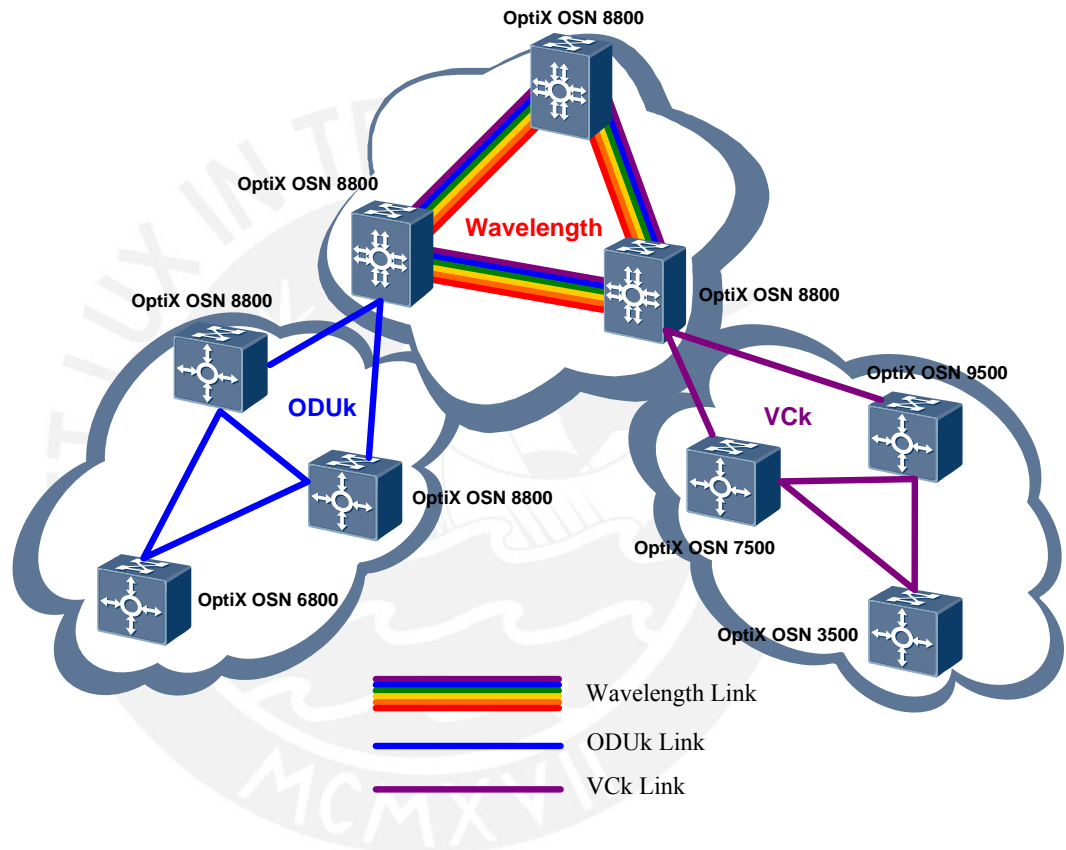

4 Network Application

About This Chapter

4.1 Networking and Applications

The OptiX OSN 8800 T32 and OptiX OSN 8800 T64 support the point-to-point networking, chain networking, ring networking, and mesh networking. It can be networked with other WDM and SDH equipment to realize a complete transport solution.

4.1 Networking and Applications

The OptiX OSN 8800 T32 and OptiX OSN 8800 T64 support the point-to-point networking, chain networking, ring networking, and mesh networking. It can be networked with other WDM and SDH equipment to realize a complete transport solution.

4.1.1 Basic Networking Modes

The OptiX OSN 8800 T32 and OptiX OSN 8800 T64 support point-to-point networking, chain networking, ring networking, and mesh networking. It can be networked with other WDM and SDH or SONET equipment to realize a complete transport solution.

Different networking modes are applied to different application scenarios. You need to select the required networking mode according to the service requirements.

Point-to-Point Network

A point-to-point network is the basic application. It is used for end-to-end service transmission. The other networking modes are based on point-to-point networking mode, which is the basic network. A point-to-point network is generally used to transmit common voice services, private line data services, and storage services.

Chain Network

The chain network with OADM(s) is suitable for a scenario where wavelengths need to be added/dropped and passed through. A chain network has similar service types as a point-to-point network, but the chain network is more flexible than the point-to-point network. It can be applicable not only to the point-to-point service but also applicable to the convergence service and broadcast service dedicated for simple networking.

Ring Network

Network security and reliability are key factors that indicate the quality of the services provided by network operators. Because of the high survivability, ring network is a dominant networking mode in MAN DWDM network planning. The ring network has the widest application range. It can be applicable to the point-to-point service, convergence service, and broadcast service. It can diversify into complex network structures such as tangent rings, intersecting rings, and ring with chain.

Mesh Network

A large number of nodes are connected by straight routes on a mesh network. Mesh networks have no node bottleneck and ensure unblocked services through alternative routes during equipment failure. In a mesh network, more than one route is available between two nodes. Thus, the mesh network has high service transmission reliability, and the mesh topology is a mainstream networking mode for ASON networks. The mesh networking features flexibility and scalability. It is widely used in ASON networks.


4.1.2 Typical OTN Networking

The OptiX OSN 8800 can be jointly used not only with the OptiX OSN 6800 or OptiX OSN 3800 to form a complete OTN end-to-end network, but also with the OptiX BWS 1600G or OptiX Metro 6100 to form a WDM network. The OTN or WDM network is then used to transmit the services from the NG SDH/PTN or data communication equipment. In this manner, the OptiX OSN 8800 T32 and OptiX OSN 8800 T64 implement a complete transport solution.

Typical OTN Networking

When working with the OptiX OSN 6800, the OptiX OSN 8800 T32 and OptiX OSN 8800 T64 can form an OTN network or a DWDM ring to transport or add/drop services on the WDM line. [Figure 4-1](#) shows the typical OTN networking.

Figure 4-1 Typical OTN networking

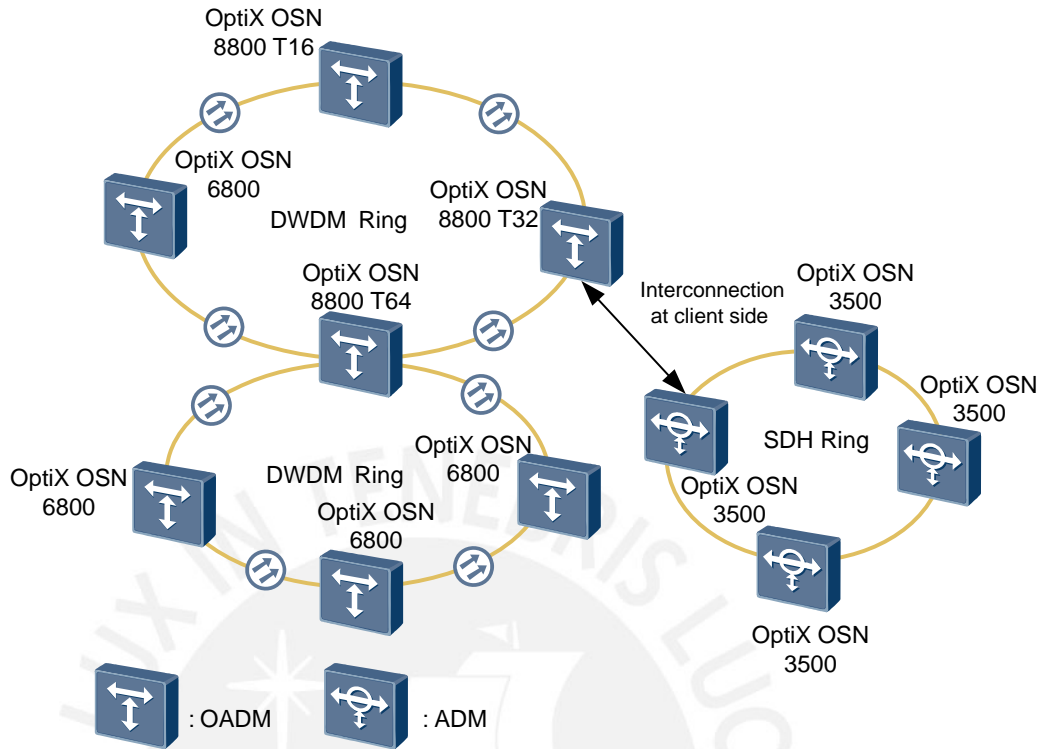


WSS Grooming Solution

ROADM in wavelength selective switch (WSS) mode is applicable to intra-ring grooming and inter-ring grooming.

At a network node, ROADM in WSS mode can freely change the add/drop status or pass-through status of a wavelength, and does not interrupt a service in the change process. ROADM can work with tunable lasers to flexibly groom wavelengths.

WSS enables output of any wavelength through any port. A port in WSS mode can be used as either a port for local wavelength adding or dropping or a multi-directional MS port. WSS can work with WSS or a coupler to build ROADM, as shown in Figure 4-2.


Figure 4-2 Functional diagram of a WSS-based ROADM node

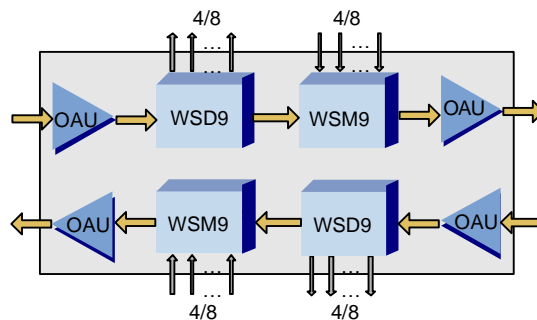

WSS realizes colorless wavelength add/drop. Users can set the add/drop or pass-through state of wavelengths on the NMS. In addition, the dynamic wavelength status can be adjusted remotely and the services can be fast provisioned.

WSS supports the wavelength grooming in multiple directions and the multi-dimensional ROADM structure. With WSS, the wavelength resources of multi-directional node on a ring with chain or intersecting rings network are reconfigurable, as shown in Figure 4-3.

Figure 4-3 Inter-ring grooming ROADM solution

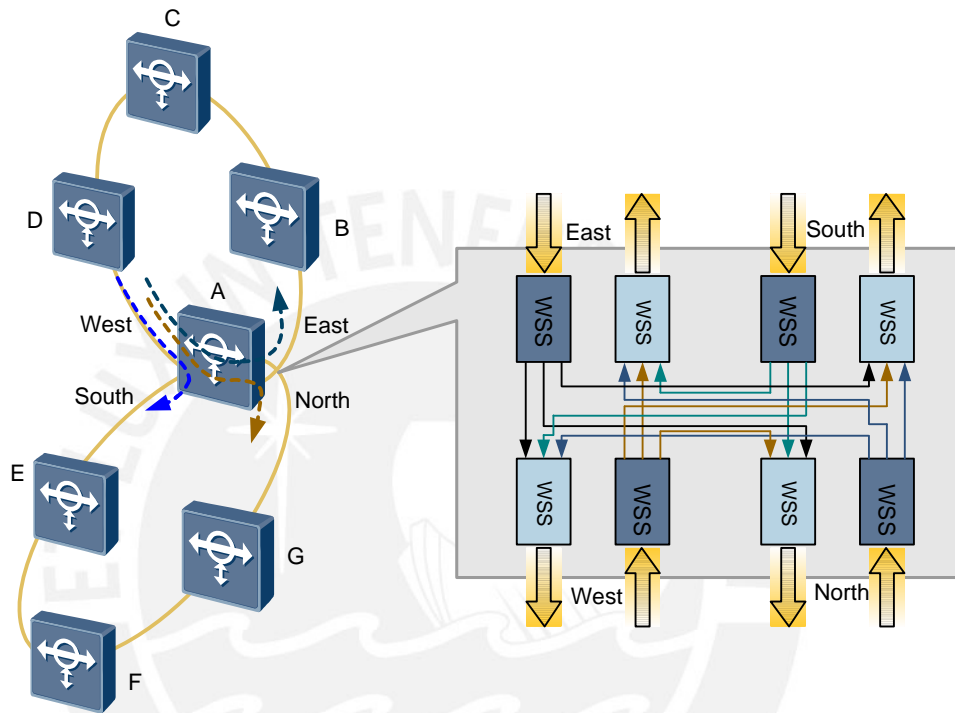


Application of Electrical-Layer Grooming

The OptiX OSN 8800 grooms services by means centralized cross-connections.

The cross-connect capacity of each service slot is 40 Gbit/s and the equipment supports ODU0, ODU1, ODU2, and ODU3 cross-connections. GE, 2.5G, and 10G services can share bandwidth to improve bandwidth utilization. As shown in Figure 4-4, a GE service and a 2.5G service share a wavelength.


Figure 4-4 Application of electrical-layer grooming

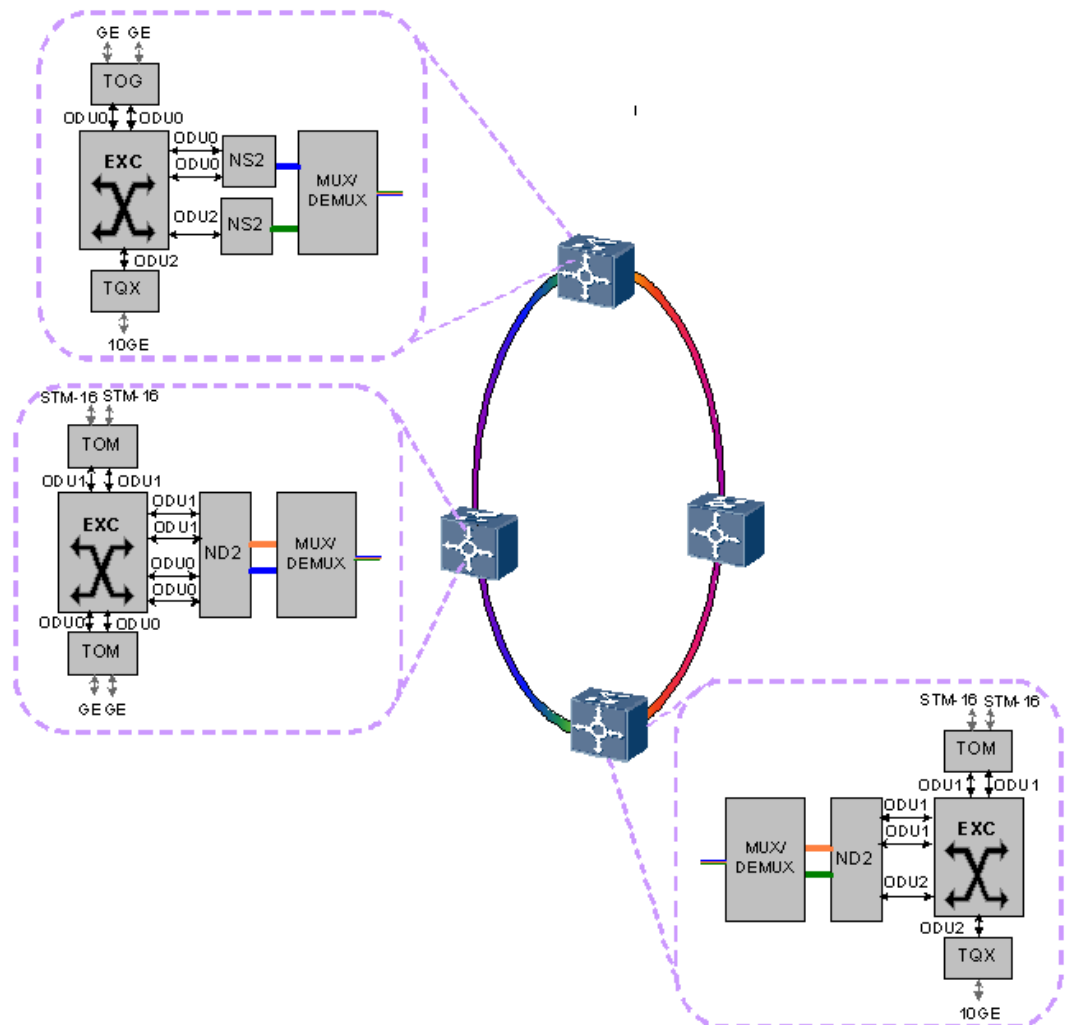

Optical-Electrical Convergence Solution

At the service access end, the equipment cross-connects multi-rate services to 40G channels for transmission. At a service pass-through station, the equipment fast transmits services by means of ROADM optical cross-connections. At the service receive end, the equipment drops 40G services from the line by processing electrical-layer cross-connections. If a wavelength conflict occurs during optical-layer cross-connections, the equipment can convert wavelengths by means of electrical-layer cross-connections. In addition, when the transmission distance exceeds the limit, electrical regeneration can be used. As shown in Figure 4-5, the wavelengths of two services conflict. In this case, wavelengths can be converted by means of electrical-layer cross-connections. When the performance of the line deteriorates and results in bit errors, electrical regeneration can be used to transmit services.

Figure 4-5 Application of electrical-layer grooming

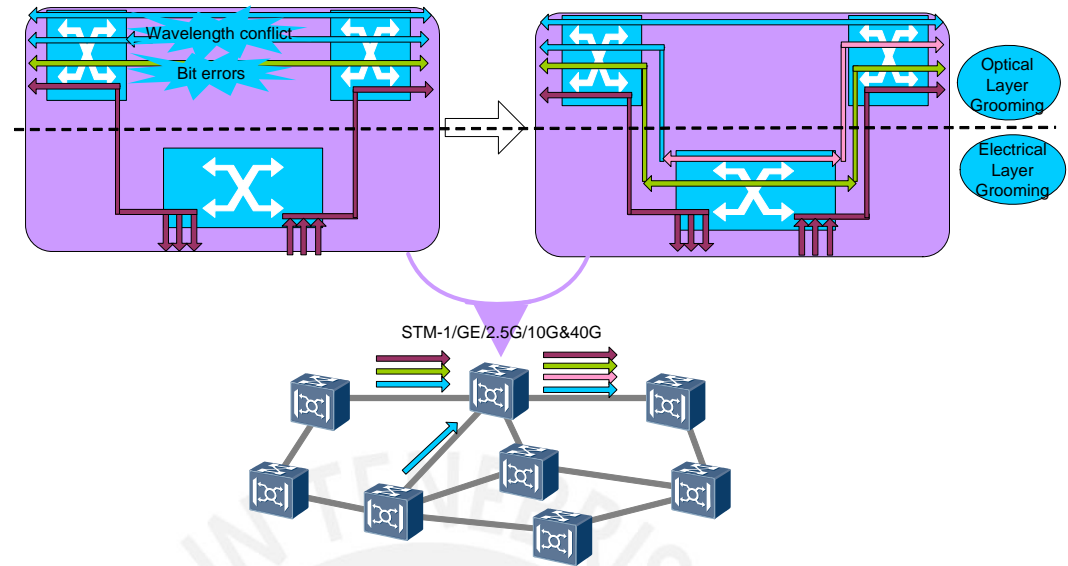


WDM ASON Solution

The equipment supports the ASON control plane. With the ASON control plane and WDM features such as ROADM, FOADM, and optical wavelength/sub-wavelength protection, the equipment provides an ideal WDM ASON solution.

At the core layer of a network, a mesh network is built with WSS/ROADM for wavelength rerouting. At network edges, ring and chain networks are built with traditional FOADM, OTM, or PLC ROADM, as the service volume is low and fiber resources are insufficient. For details, see [Figure 4-6](#).

An ASON network provides the same protection solutions as a traditional network does. In addition, GMPLS and WSS together provide wavelength rerouting for services under no protection or 1+1 protection on a mesh network. This helps improve survivability of services.

Figure 4-6 WDM ASON solution

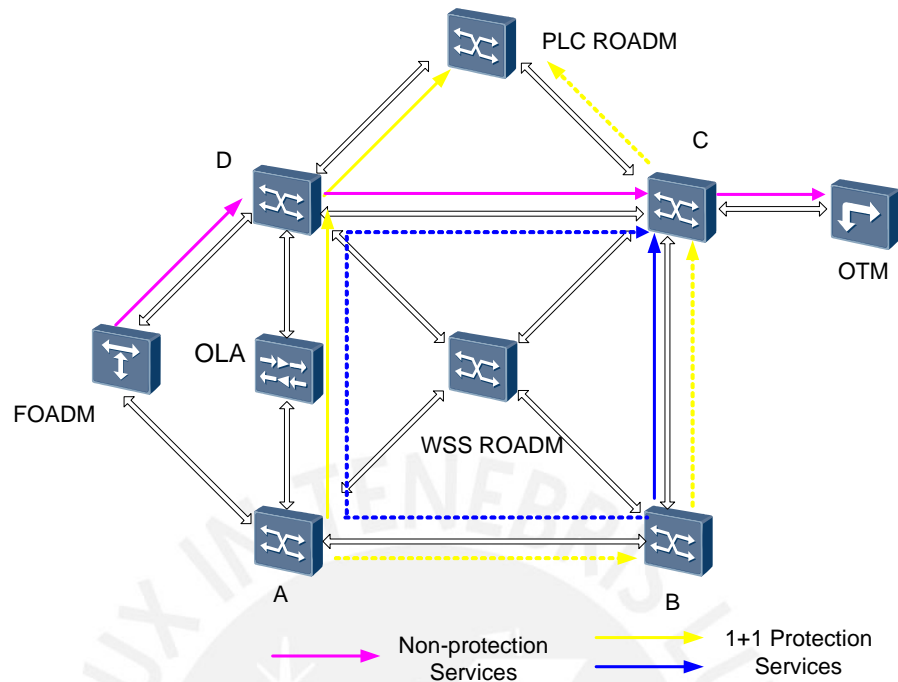


4.1.3 Typical OCS Networking

Networking for Multi-Granularity Service Grooming, Service Convergence and Bandwidth Switching

The OptiX OSN 8800 can provide the networking application of the multi-granularity service grooming and service convergence functions.

Figure 4-7 shows the networking application of the multi-granularity service grooming and service convergence functions of the OptiX OSN 8800. The OptiX OSN 8800 implement the large-capacity grooming of STM-64, STM-16, STM-4, STM-1 services. The OptiX OSN 8800 can form a hybrid network with different equipment such as DWDM and MSTP.

Figure 4-7 Networking configuration of the OptiX OSN 8800 performing multi-granularity service grooming and service convergence

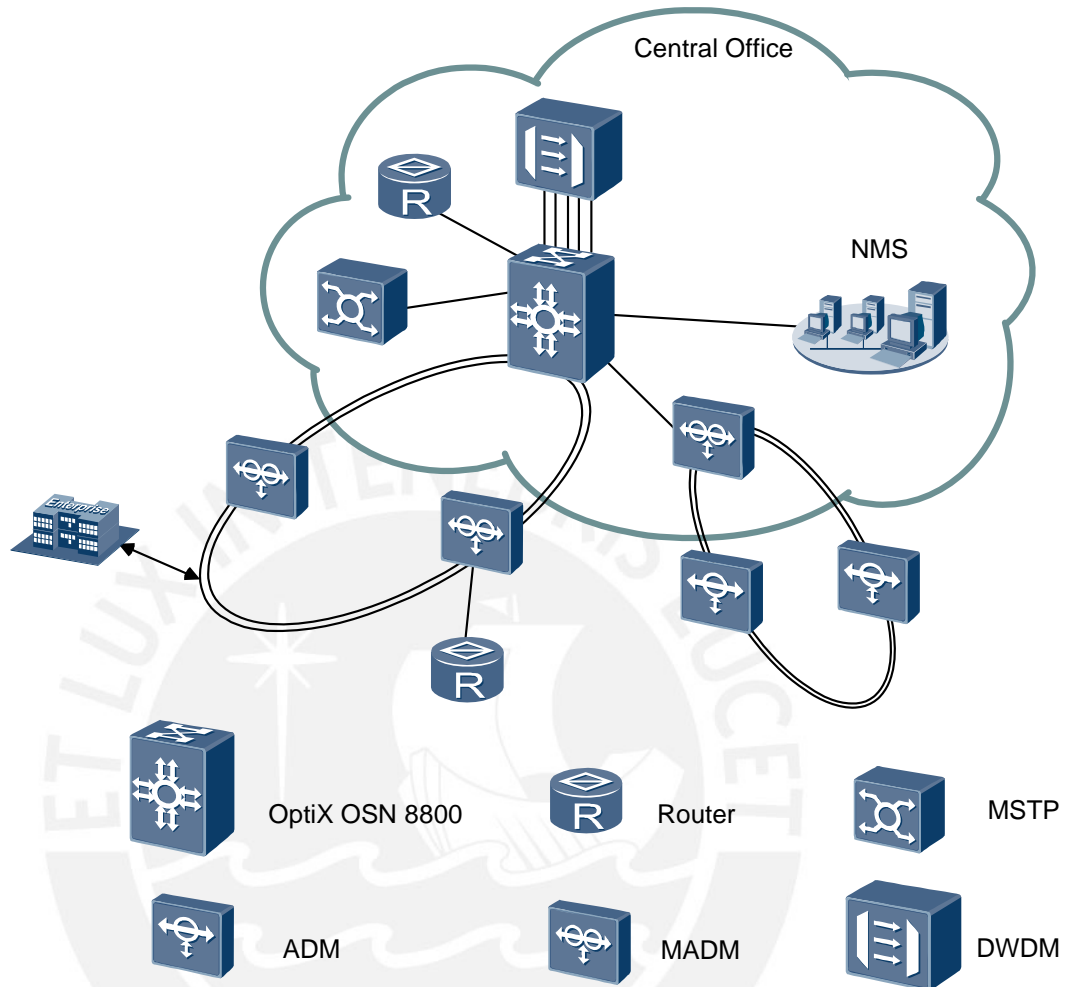

Networking Application of Ethernet Services


The networking application of Ethernet services includes point-to-point networking for the GE/10GE service, Layer 2 switching networking for the GE/10GE service, and transparent transmission networking for the GE service.

Point-to-Point Networking for the GE/10GE Service

A large and flexible bandwidth is required by Internet service provider (ISP) and application service provider (ASP) for efficient service connection. The OptiX OSN 8800 provides a direct GE service interface. Therefore, the point-to-point transmission of the Ethernet services over a long distance can be realized over the SDH networks.

Figure 4-8 shows the flexible networking modes of the OptiX OSN 8800. The network can be a chain, a ring, a mesh network or a combination of these three modes.


Figure 4-8 Point-to-point connection of the GE/10GE service

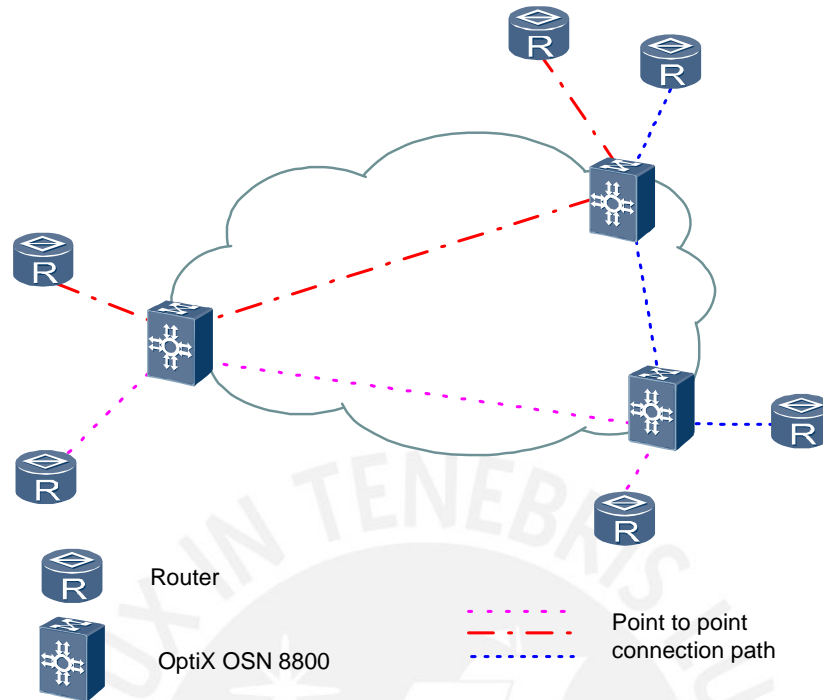

Layer 2 Switching Networking for the GE/10GE Service

The OptiX OSN 8800 equipment provides the Layer 2 switching boards to achieve the Layer 2 switching from a GE/10GE service to a GE/10GE service.


Figure 4-9 Transparent Transmission Networking for the GE/10GE Service

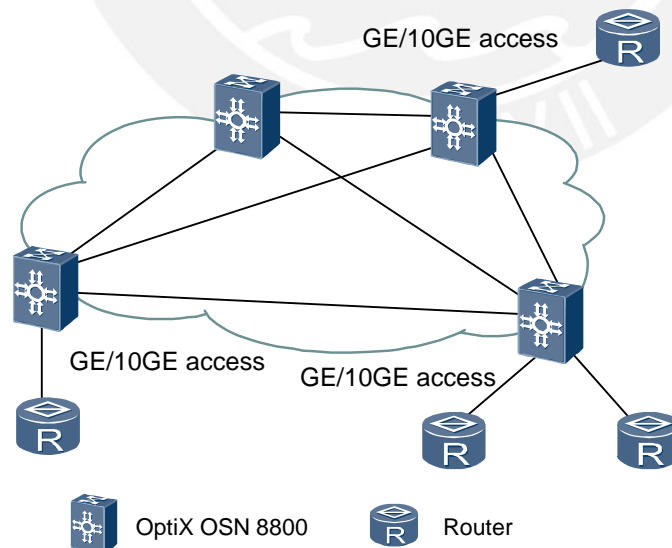

Transparent Transmission Networking for the GE/10GE Service

The Layer 2 switching boards of the OptiX OSN 8800 equipment can transparently transmit the GE/10GE service. Moreover, it can be directly accessed to a router.


Figure 4-10 Transparent transmission of GE/10GE services

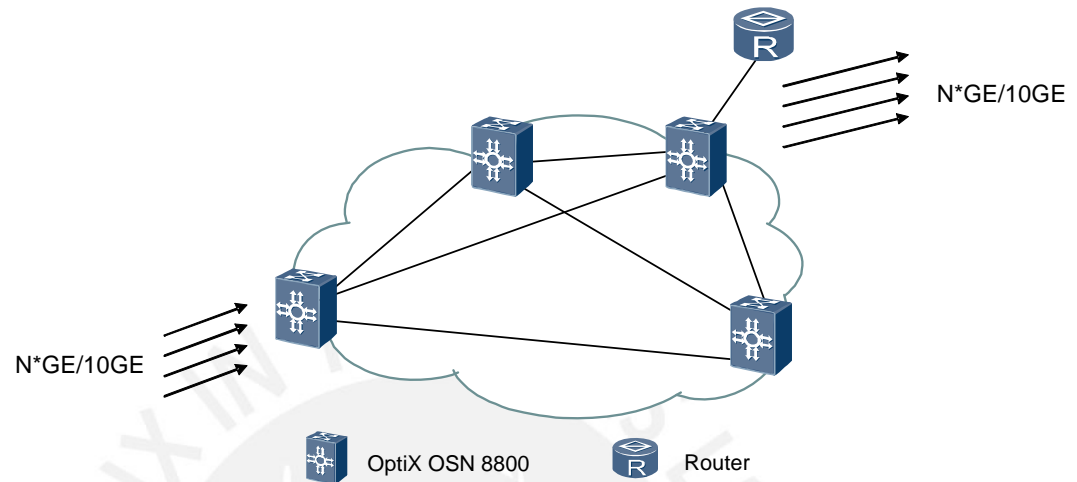

Networking with SDH Equipment to Be the Metropolitan Backbone Node

The OptiX OSN 8800 node features powerful service grooming capability and stronger survivability. The abundant service interfaces of the OptiX OSN 8800 meet the demand for grooming services in the metropolitan backbone network. It can simplify the networking topology and can be deployed in a hybrid network together with the other OptiX OSN product. Working with the end-to-end trail management function of the U2000, the OptiX OSN 8800 can be operated and maintained in simpler and more convenient manner.


Figure 4-11 Network of the OptiX OSN 8800 combined with the OptiX OSN product

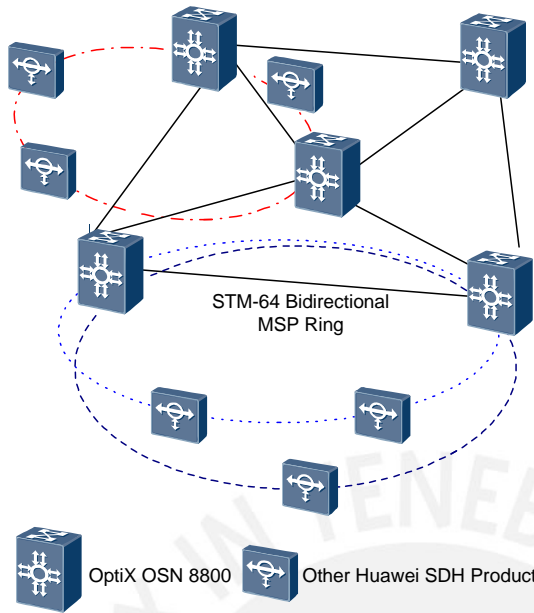

Networking with DWDM Equipment to Be the Supertrunk Backbone Node

The OptiX OSN 8800 can work with the OptiX BWS 1600 to increase the regenerator-free span-crossing distance.

Figure 4-12 Networking application of the OptiX OSN 8800 and the DWDM equipment

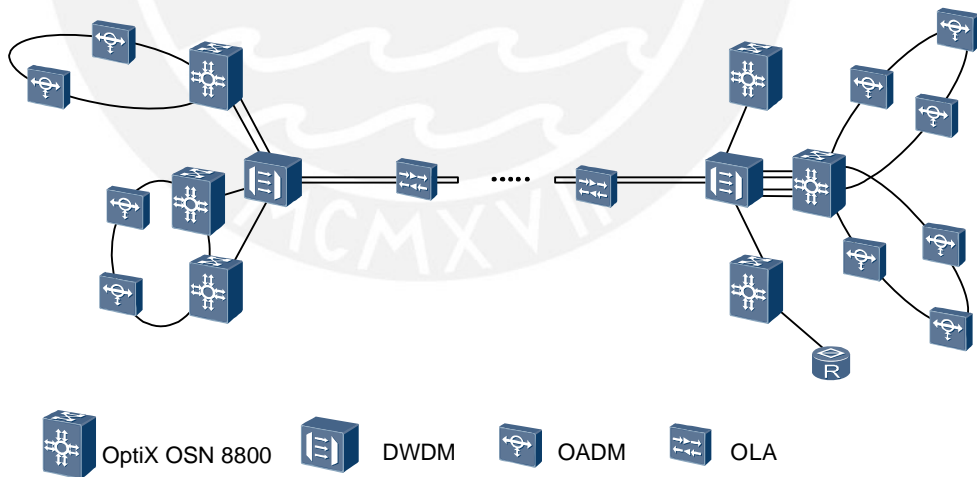

5 About the ASON

About This Chapter

The ASON, the automatically switched optical network, is a new generation of the optical transmission network, all called ASON optical network. This section describes some basic concepts of the ASON and application of the ASON software.

5.1 Overview

The ASON software provided by Huawei can be applied to the OptiX OSN series products to support the evolution from traditional network to ASON network. It complies with the ITU and IETF ASON/GMPLS-related standards.

5.1 Overview

The ASON software provided by Huawei can be applied to the OptiX OSN series products to support the evolution from traditional network to ASON network. It complies with the ITU and IETF ASON/GMPLS-related standards.

5.1.1 Background and Advantages

Compared with the WDM network, the transmission network that applies the new ASON technology shows advantages in service configuration, bandwidth utilization and protection schemes.

In the traditional transmission network, the WDM transmission equipment functions as fibers. Currently, the WDM transmission equipment also carries services. As a result, more requirements are for the operability of the WDM equipment. The traditional network has the following problems:

- The service configuration is complex and capacity expansion or service provision takes a long period.
- The bandwidth utilization is of a low rate and low efficiency. In a ring network, half of the bandwidth should be reserved.
- Just a few protection schemes are available and the performance of self-healing protection is poor.

The ASON has been developed to solve these problems. This technology involves signaling switching and a control plane to enhance its network connection management and recovery

capability. It supports end-to-end service configuration and the service level agreement (SLA).

Service Configuration

Traditional WDM networks are generally chains and rings. The trails and timeslots of their services are manually configured ring by ring and point by point, which consumes a lot of time and effort. As networks become increasingly large and complicated, this service configuration mode cannot meet the rapidly increasing user demands.

The ASON successfully solves this problem by end-to-end service configuration. To configure a service, you only need to specify its source node, sink node, bandwidth requirement and protection type; the network automatically performs the required operations.

Bandwidth Utilization

Traditional WDM optical transmission networks have a large amount of resources reserved and lack advanced service protection, and the restore and routing functions. In contrast, with the routing function the ASON can provide protection by reserving fewer resources, thus increasing network resource utilization.

Protection and Restoration

Chain and ring are the main topologies used in a traditional WDM network. Optical line protection or board-level protection are the main protection schemes for the services. In ASON, mesh is the main topology. Besides protections, the dynamic restoring function is available to restore the services dynamically. In addition, when there are multiple failures in a network, the services can be restored as many as possible.

According to the difference in the service restoration time, multiple service types are defined in ASON networks to meet different customer requirements.

5.1.2 Features of the ASON

As a new technology on the transmission network, the ASON has its own features.

Compared with the traditional network, the ASON has the following features:

- Supports the route calculation strategy that is based on optics parameters and eliminates the route that does not comply with optics parameters automatically.
- Supports the automatic adjustment of wavelengths during rerouting or optimization, which solves the wavelength conflict problem. (For OTN network)
- Wavelengths can be automatically allocated for newly created services.
- Configures end-to-end services automatically.
- Discovers the topology automatically.
- Provides mesh networking that enhances the survivability of the network.
- Supports different services which are provided with different levels of protection.
- Provides traffic engineering and dynamically adjusts the network logic topology in real time to optimize the configuration of network resources.

6 Technical Specifications

About This Chapter

6.1 General Specifications

6.1 General Specifications

6.1.1 Cabinet Specifications

Table 6-1 lists the typical configurations of the N63B cabinet.

Table 6-1 Technical specifications

Item	Specification
Dimensions	600 mm (W) x 300 mm (D) x 300 mm (H)
Weight (kg)	60 kg
Standard working voltage	-48 V DC or -60 V DC
Working voltage range	-40 V DC to -72 V DC

Table 6-2 lists the typical configurations of the N66B cabinet.

Table 6-2 Technical specifications

Item	Specification
Dimensions	600 mm (W) x 600 mm (D) x 2200 mm (H)
Weight (kg)	85 kg
Standard working voltage	-48 V DC or -60 V DC
Working voltage range	-40 V DC to -72 V DC

6.1.2 Subrack Specifications

Table 6-3 Technical specifications of the OptiX OSN 8800 T64 subrack

Item	Specification
Dimensions	498 mm (W) × 580 mm (D) × 900 mm (H) (19.6 in. (W) × 22.8 in. (D) × 35.4 in. (H))
Weight (empty subrack ^a)	65 kg (143 lb.)
Maximum subrack power consumption ^b	9600 W
Recommended typical configuration power consumption (OTN)	less than 4000 W
Recommended typical configuration power consumption (OCS)	less than 3200 W
Rated working current	200 A (four 50 A switched-mode power supplies)
Nominal working voltage	-48V DC/-60V DC
Working voltage range	-40V DC to -72V DC
<p>a: An empty subrack means no boards are installed in the board area, and no fan tray assembly or air filter is installed.</p> <p>b: The maximum subrack power consumption refers to the maximum power consumption configuration that the subrack can support and the maximum heat dissipation capability of the subracks. In the actual application, the value is much higher than the power consumption of the subrack in typical configuration.</p>	

Table 6-4 Power consumption of the common units in the OptiX OSN 8800 T64

Unit Name		Typical Power Consumption at 25°C (77°F) (W) ^a	Maximum Power Consumption at 55°C (131°F) (W) ^a	Remarks
Subrack	OTU subrack	1804.6	3135.9	It is the power consumed after you install thirty-two LDXes, one SCC, eight PIUs, two AUXes, one EFI1, one EFI2, one ATE and four fan tray assemblies in an OTU subrack.

Unit Name		Typical Power Consumption at 25°C (77°F) (W) ^a	Maximum Power Consumption at 55°C (131°F) (W) ^a	Remarks
	OTU subrack	3569.6	5007.2	It is the power consumed after you install two XCTs, two SXMs, twenty NQ2s, one SCC, eight PIUs, five TOMs, five TQXes, two AUXes, one EF11, one EF12, one ATE and four fan tray assemblies in an OTU subrack.
	OTM subrack	966.2	2175.9	It is the power consumed after you install one M40V, one D40, one OAU1, one OBU1, twelve LDXes, one SCC, one SC2, four PIUs, one AUX, one EF11, one EF12, one ATE and four fan tray assemblies in an OTM subrack.
OCS System		2169.9	-	It is the power consumed after you install two SXMs, twenty SLD64s, eight SLO16s, four SLQ16s, four SLH41s, four EGSHeS, two STGs, one STI, two SCCs, eight PIUs, two AUXes, one EF11, one EF12, one ATE and four fan tray assemblies in an OCS system.
<p>a: Indicates that the power consumption of the subrack and cabinet is the value in a certain configuration. The value is for reference only. The actual power consumed by the chassis and cabinet is a calculation based on the power consumption of each module.</p>				

Table 6-5 Technical specifications of the OptiX OSN 8800 T32 subrack

Item	Specification
Dimensions	498 mm (W) × 295 mm (D) × 900 mm (H) (19.6 in. (W) × 11.6 in. (D) × 35.4 in. (H))
Weight (empty subrack ^a)	35 kg (77.1 lb.)
Maximum subrack power consumption ^b	4800 W
Recommended typical configuration power consumption (OTN)	less than 3000 W
Recommended typical configuration power consumption (OCS)	less than 2400 W

Item	Specification
Rated working current	100 A (two 50 A switched-mode power supplies)
Nominal working voltage	-48V DC/-60V DC
Working voltage range	-40V DC to -72V DC
<p>a: An empty subrack means no boards are installed in the board area, and no fan tray assembly or air filter is installed.</p> <p>b: The maximum subrack power consumption refers to the maximum power consumption configuration that the subrack can support and the maximum heat dissipation capability of the subrack. In the actual application, the value is much higher than the power consumption of the subrack in typical configuration.</p>	

Table 6-6 Power consumption of the subrack in typical configuration in the OptiX OSN 8800 T32

Unit Name		Typical Power Consumption at 25°C (77°F) (W) ^a	Maximum Power Consumption at 55°C (131°F) (W) ^a	Remarks
Subrack	OTU subrack	1633.4	2408.6	It is the power consumed after you install thirty-two LDXes, one SCC, four PIUs, one AUX, one EFI1, one EFI2, one ATE and two fan tray assemblies in an OTU subrack.
	OTU electrical cross-connection subrack	3158.1	4002.8	It is the power consumed after you install two XCHes, twenty NQ2s, one SCC, four PIUs, five TQXes, five TOMs, one AUX, one EFI1, one EFI2, one ATE and two fan tray assemblies in an OTU electrical cross-connection subrack.
	OTM subrack	795	1448.6	It is the power consumed after you install one M40V, one D40, one OAU1, one OBU1, twelve LDXes, one SCC, four PIUs, one AUX, one EFI1, one EFI2, one ATE and two fan tray assemblies in an OTM subrack.

Unit Name		Typical Power Consumption at 25°C (77°F) (W) ^a	Maximum Power Consumption at 55°C (131°F) (W) ^a	Remarks
	OLA subrack	290.3	860	It is the power consumed after you install four OBU1s, four VA1s, one SC2, one SCC, four PIUs, one AUX, one EF11, one EF12, one ATE and two fan tray assemblies in an OLA subrack.
	OADM subrack	974	1651.2	It is the power consumed after you install two OAU1s, two MR8Vs, sixteen LDXes, one SC2, one SCC, four PIUs, one AUX, one EF11, one EF12, one ATE and two fan tray assemblies in an OADM subrack.
		380.7	972.5	It is the power consumed after you install two M40Vs, two D40s, two FIUs, one SC2, two RMU9s, two WSM9s, two OAU1s, two OBU1s, one SCC, four PIUs, one AUX, one EF11, one EF12, one ATE and two fan tray assemblies in an OADM subrack.
		374.1	465.6	It is the power consumed after you install two M40s, two D40s, two WSMD9s, two DAS1s, one SCC, four PIUs, one AUX, one EF11, one EF12, one ATE and two fan tray assemblies in an OADM subrack.
OCS System		1507.4	-	It is the power consumed after you install two XCMs, ten SLQ64s, eight SLO16s, two SLH41s, two EGSHeS, two STGs, one STI, two SCCs, four PIUs, one AUX, one EF11, one EF12, one ATE and two fan tray assemblies in an OCS system.
<p>a: Indicates that the power consumption of the subrack and cabinet is the value in a certain configuration. The value is for reference only. The actual power consumed by the chassis and cabinet is a calculation based on the power consumption of each module.</p>				



A Power Consumption, Weight, and Valid Slots of Boards

This chapter describes the power consumption, weight, and valid slots of the boards used in the OptiX OSN 8800 T32 and OptiX OSN 8800 T64 system.

The power consumption, weight, and valid slots of the boards for the OptiX OSN 8800 T32 and OptiX OSN 8800 T64 system are shown in [Table A-1](#). The values listed in the following table indicate the power consumption of the boards when they normally work at 25°C and 55°C.

The power consumption, weight, and valid slots of the cross-connect boards for the OptiX OSN 8800 T32 and OptiX OSN 8800 T64 system are shown in [Table A-2](#).

Table A-1 Power consumption, weight and valid slots of the OptiX OSN 8800 T32 and OptiX OSN 8800 T64 boards

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN51AUX	-	17.5	19	0.5/1.1	1	IU41	IU72, IU83
TN51ATE	-	0.3	0.3	0.2/0.4	1	IU48	IU87
TN11CMR 2	-	0.2	0.3	0.8/1.8	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11CMR 4	-	0.2	0.3	0.9/2.0	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11CRP C01	-	110.0	121.0	4.0/8.8	-	Installed outside	Installed outside
TN11CRP C03	-	70.0	77.0	4.2/9.2	-	Installed outside	Installed outside

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN11D40	-	10.0	13.0	2.2/4.8	3	IU1-IU6, IU11-IU17, IU20-IU25, IU29-IU34	IU1-IU6, IU11-IU16, IU19-IU24, IU27-IU32, IU35-IU40, IU45-IU50, IU53-IU58, IU61-IU66
TN11D40V	-	20.0	25.0	2.3/5.1	3	IU1-IU6, IU11-IU17, IU20-IU25, IU29-IU34	IU1-IU6, IU11-IU16, IU19-IU24, IU27-IU32, IU35-IU40, IU45-IU50, IU53-IU58, IU61-IU66
TN11DAS1	-	22	28.6	1.4/3.1	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11DCP	-	6.8	7.5	1.0/2.2	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN12DCP	-	6.8	7.5	1.0/2.2	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11DCU	-	0.2	0.3	1.5/3.3	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11DMR1	-	0.2	0.3	0.7/1.5	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN51EFI1	-	5.0	7.0	0.2/0.4	1	IU38	IU76
TN51EFI2	-	13.0	15.0	0.3/0.7	1	IU37	IU71

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN54ENQ2	-	40.0	44.0	0.9/2.0	1	IU1, IU5, IU12, IU16, IU20, IU24, IU29, IU33	IU1, IU5, IU11, IU15, IU19, IU23, IU27, IU31, IU35, IU39, IU45, IU49, IU53, IU57, IU61, IU65
TN12FIU	-	4.2	4.6	1.0/2.2	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN13FIU	-	0.2	0.3	1.0/2.2	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11GFU	-	0.2	0.3	0.9/2.0	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11HBA	-	47.0	75.0	3/6.6	3	IU2-IU7, IU12-IU18, IU21-IU26, IU30-IU35	IU2-IU7, IU12-IU17, IU20-IU25, IU28-IU33, IU36-IU41, IU46-IU51, IU54-IU59, IU62-IU67
TN11HSC1	-	8	8.8	1.0/2.2	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11ITL	-	0.2	0.3	1.2/2.6	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN12ITL	-	10	11.5	1.2/2.6	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN12LDM	-	22.6	24.8	1.1/2.4	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11LDM D	-	26.9	29.6	1.2/2.6	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11LDM S	-	26.9	29.6	1.1/2.4	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN12LDX	800 ps/nm-C Band (Odd & Even Wavelengths)-Fixed Wavelength -NRZ-PIN-XFP	44.5	51.2	1.6/3.5	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
	800 ps/nm-C Band-Tunable Wavelength -NRZ-PIN-XFP	45.5	52.2				
TN11LEM 24	800 ps/nm-C Band (Odd & Even Wavelengths)-Fixed Wavelength -NRZ-PIN-XFP	81.0	83.0	1.0/2.2	2	IU1-IU7, IU12-IU18, IU20-IU26, IU29-IU35	IU1-IU7, IU11-IU17, IU19-IU25, IU27-IU33, IU35-IU41, IU45-IU51, IU53-IU59, IU61-IU67
	800 ps/nm-C Band-Tunable Wavelength -NRZ-PIN-XFP	82.0	84.0				

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
	10Gbit/s Multirate - 10km 10Gbit/s Multirate - 40km 10Gbit/s Multirate - 80km	81.0	83.0				
TN11LEX4	800 ps/nm-C Band (Odd & Even Wavelengths)-Fixed Wavelength -NRZ-PIN-XFP	64.0	67.0	0.7/1.5	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
	800 ps/nm-C Band-Tunable Wavelength -NRZ-PIN-XFP	65.0	68.0				
	10Gbit/s Multirate - 10km 10Gbit/s Multirate - 40km 10Gbit/s Multirate - 80km	64.0	67.0				

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN11LOG	800 ps/nm-C Band (odd & even wavelengths)-Fixed Wavelength -NRZ-PIN	40.0	45.0	1.6/3.5	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
	800 ps/nm-C Band-Fixed Wavelength -NRZ-PIN						
	1200 ps/nm-C Band-Tunable Wavelength -NRZ-PIN	43.0	48.0				
	1200 ps/nm-C Band-Tunable Wavelength -NRZ-APD						
	800 ps/nm-C Band-Tunable Wavelength -DRZ-PIN	43.5	48.5				
	4800 ps/nm-C Band-Tunable Wavelength -ODB-APD	55.0	60.5				

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN12LOG	800 ps/nm-C Band (Odd & Even Wavelengths)-Fixed Wavelength -NRZ-PIN-XFP	37.0	41.44	1.2/2.6	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
	800 ps/nm-C Band-Tunable Wavelength -NRZ-PIN-XFP	38.0	42.44				
	800 ps/nm-C Band-Tunable Wavelength -NRZ-PIN	41.61	46.6				
	800 ps/nm-C Band-Tunable Wavelength -DRZ-PIN	43.04	48.0				
	10Gbit/s Multirate - 10km 10Gbit/s Multirate - 40km 10Gbit/s Multirate - 80km	37.0	41.44				

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN11LOM	800 ps/nm-C Band (odd & even wavelengths)-Fixed Wavelength -NRZ-PIN	92.7	101.7	2.3/5.1	2	IU1-IU7, IU12-IU18, IU20-IU26, IU29-IU35	IU1-IU7, IU11-IU17, IU19-IU25, IU27-IU33, IU36-IU41, IU45-IU51, IU53-IU59, IU61-IU67
	800 ps/nm-C Band-Fixed Wavelength -NRZ-PIN						
	1200 ps/nm-C Band-Tunable Wavelength -NRZ-PIN	92.9	101.9				
	1200 ps/nm-C Band-Tunable Wavelength -NRZ-APD						
	800 ps/nm-C Band-Tunable Wavelength -DRZ-PIN	93.4	102.7				
	4800 ps/nm-C Band-Tunable Wavelength -ODB-APD	98.2	108.0				

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN12LOM ^a	800 ps/nm-C Band (Odd & Even Wavelengths)-Fixed Wavelength -NRZ-PIN-XFP	61.8	69.2	1.1/2.4	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
	800 ps/nm-C Band-Tunable Wavelength -NRZ-PIN-XFP	62.8	70.2				
	800 ps/nm-C Band-Tunable Wavelength -NRZ-PIN	64.8	72.6				
	800 ps/nm-C Band-Tunable Wavelength -DRZ-PIN	66.7	75.0				
TN13LQM	-	32.6	35.9	1.1/2.4	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN12LQMD	-	31.1	34.3	1.4/3.1	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN12LQMS	-	29.0	33.3	1.3/2.9	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN12LSX	800 ps/nm-C Band (odd & even wavelengths)-Fixed Wavelength -NRZ-PIN	30.5	36.6	1.4/3.1	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
	800 ps/nm-C Band-Fixed Wavelength -NRZ-PIN						
	1200 ps/nm-C Band-Tunable Wavelength -NRZ-PIN	30.7	36.8				
	1200 ps/nm-C Band-Tunable Wavelength -NRZ-APD						
	800 ps/nm-C Band-Tunable Wavelength -DRZ-PIN	32.5	39				
	4800 ps/nm-C Band-Tunable Wavelength -ODB-APD	35.5	42.6				
TN13LSX	800 ps/nm-C Band-Tunable Wavelength -NRZ-PIN	29.4	32.8	1.1/2.4	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
	800 ps/nm-C Band-Tunable Wavelength-DRZ-PIN	29.5	33.9				
	800 ps/nm-C Band (Odd & Even Wavelengths)-Fixed Wavelength-NRZ-PIN-XFP	27.0	30.4				
	800 ps/nm-C Band-Tunable Wavelength-NRZ-PIN-XFP	28.0	31.4				
TN12LSXL	ODB-tunable (40G)(Transponder)	74.0	81.0	4.1/9.0	3	IU3-IU8, IU14-IU19, IU22-IU27, IU31-IU36	IU3-IU8, IU13-IU18, IU21-IU26, IU29-IU34, IU38-IU42, IU47-IU52, IU55-IU60, IU63-IU68
	DQPSK-tunable (40G)(Transponder)	84.0	94.0				
TN11LSQ	ODB-tunable (40G)(Transponder)	75	82	2.5/5.5	2	IU2-IU8, IU12-IU19, IU21-IU27, IU30-IU36	IU2-IU8, IU12-IU18, IU20-IU26, IU28-IU34, IU36-IU42, IU46-IU52, IU54-IU60, IU62-IU68
	DQPSK-tunable (40G)(Transponder)	82	89				
TN12LSXL R	DQPSK-tunable (40G)(Transponder)	62	68.2	2.5/5.5	2	IU2-IU8, IU13-IU19, IU21-IU27, IU30-IU36	IU2-IU8, IU12-IU18, IU20-IU26, IU28-IU34,

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
	ODB-tunable (40G)(Transponder)	67.0	70.0				IU36-IU42, IU46-IU52, IU54-IU60, IU62-IU68
TN11LSXR	800 ps/nm-C Band (odd & even wavelengths)-Fixed Wavelength -NRZ-PIN	34.8	37.8	1.2/2.6	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
	800 ps/nm-C Band-Fixed Wavelength -NRZ-PIN	34.8	37.8				
	1200 ps/nm-C Band-Tunable Wavelength -NRZ-PIN	35.0	38.0				
	1200 ps/nm-C Band-Tunable Wavelength -NRZ-APD	35.0	38.0				
	800 ps/nm-C Band-Tunable Wavelength -DRZ-PIN	36.8	39.8				
	4800 ps/nm-C Band-Tunable Wavelength -ODB-APD	39.8	42.8				

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN12LWXS	-	33.9	37.3	1.1/2.4	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
N1EGSH	-	89.3	98.2	1.2/2.6	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
N1SF64A	-	35.7	39.3	0.9/2.0	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
N3SLH41	-	48.5	53.4	1.0/2.2	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
N4SLO16	-	21.5	23.7	0.8/1.8	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
N4SLQ64	-	37.2	40.9	1.4/3.1	1	IU1-IU8, IU12-IU27, IU29-IU36	-
N4SF64	-	27.3	29.3	0.7/1.5	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
N4SFD64	-	38.2	42.0	1.2/2.6	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
N4SLD64	-	20.3	22.1	1.1/2.4	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
N4SL64	-	15.2	16.7	0.6/1.3	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
N4SLQ16	-	12.8	13.9	0.7/1.5	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN11M40	-	10.0	13.0	2.2/4.8	3	IU1-IU6, IU11-IU17, IU20-IU25, IU29-IU34	IU1-IU6, IU11-IU16, IU19-IU24, IU27-IU32, IU35-IU40, IU45-IU50, IU53-IU58, IU61-IU66
TN11M40 V	-	20.0	24.95	2.3/5.1	3	IU1-IU6, IU11-IU17, IU20-IU25, IU29-IU34	IU1-IU6, IU11-IU16, IU19-IU24, IU27-IU32, IU35-IU40, IU45-IU50, IU53-IU58, IU61-IU66
TN11MCA 4	-	8.0	8.5	1.9/4.2	2	IU1-IU7, IU11-IU18, IU20-IU26, IU29-IU35	IU1-IU7, IU11-IU17, IU19-IU25, IU27-IU33, IU35-IU41, IU45-IU51, IU53-IU59, IU61-IU67
TN11MCA 8	-	12.0	13.0	1.9/4.2	2	IU1-IU7, IU11-IU18, IU20-IU26, IU29-IU35	IU1-IU7, IU11-IU17, IU19-IU25, IU27-IU33, IU35-IU41, IU45-IU51, IU53-IU59, IU61-IU67
TN11MR2	-	0.2	0.3	0.9/2.0	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11MR4	-	0.2	0.3	0.9/2.0	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN11MR8	-	0.2	0.3	1.0/2.2	2	IU1-IU7, IU11-IU18, IU20-IU26, IU29-IU35	IU1-IU7, IU11-IU17, IU19-IU25, IU27-IU33, IU35-IU41, IU45-IU51, IU53-IU59, IU61-IU67
TN11MR8 V	-	7.7	8.6	1.0/2.2	2	IU1-IU7, IU12-IU18, IU20-IU26, IU29-IU35	IU1-IU7, IU11-IU17, IU19-IU25, IU27-IU33, IU35-IU41, IU45-IU51, IU53-IU59, IU61-IU67
TN52ND2	800 ps/nm-DRZ-tunable	67.8	74.6	1.4/3.1	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
	800 ps/nm-NRZ-tunable	70.5	77.5				
TN54NQ2	800 ps/nm-C Band (Odd & Even Wavelengths)-Fixed Wavelength-NRZ-PIN-XFP	53	58.3	1.6/3.5	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
	10Gbit/s Multirate - 10km 10Gbit/s Multirate - 40km	53	58.3				

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
	800 ps/nm-C Band-Tunable Wavelength -NRZ-PIN-XFP	57	62.3				
TN54NPO2	-	134.0	147.0	1.9/4.2	2	IU3, IU7, IU14, IU18, IU22, IU26, IU31, IU35	IU3, IU7, IU13, IU17, IU21, IU25, IU29, IU33, IU37, IU41, IU47, IU51, IU55, IU59, IU63, IU67
TN55NPO2	-	143.0	157.3	1.7/3.6	2	IU3, IU7, IU14, IU18, IU22, IU26, IU31, IU35	IU3, IU7, IU13, IU17, IU21, IU25, IU29, IU33, IU37, IU41, IU47, IU51, IU55, IU59, IU63, IU67
TN52NQ2	800 ps/nm (XFP)	88.0	97.0	2.0/4.4	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
	10Gbit/s Multirate - 10km 10Gbit/s Multirate - 40km	88.0	97.0				

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
	800 ps/nm - NRZ - tunable - PIN	92.0	101.0				
TN52NS2	800 ps/nm -NRZ- tunable	46.46	51.1	1.3/2.9	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
	800ps/nm-DRZ- tunable	47	51.7				
TN52NS3	ODB-tunable (40G)(Transponder)	110.0	118.0	2.4/5.3	2	IU2-IU8, IU13-IU19, IU21-IU27, IU30-IU36	IU2-IU8, IU12-IU18, IU20-IU26, IU28-IU34, IU36-IU42, IU46-IU52, IU54-IU60, IU62-IU68
	DQPSK-tunable (40G)(Transponder)	118.0	130.0				
TN54NS3	DQPSK-tunable (40G)(Transponder)	71.0	78.0	1.8/4.0	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
	ODB-tunable (40G)(Transponder)	60.0	66.0				
TN11OAU 101	-	18.0	24.0	1.8/4.0	2	IU2-IU8, IU12-IU19, IU21-IU27, IU30-IU36	IU2-IU8, IU12-IU18, IU20-IU26, IU28-IU34, IU36-IU42, IU46-IU52, IU54-IU60, IU62-IU68
TN11OAU 102	-	14.0	18.0	1.8/4.0	2	IU2-IU8, IU12-IU19, IU21-IU27, IU30-IU36	IU2-IU8, IU12-IU18, IU20-IU26, IU28-IU34, IU36-IU42, IU46-IU52, IU54-IU60, IU62-IU68

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN110AU 103	-	18.0	24.0	1.8/4.0	2	IU2-IU8, IU12-IU19, IU21-IU27, IU30-IU36	IU2-IU8, IU12-IU18, IU20-IU26, IU28-IU34, IU36-IU42, IU46-IU52, IU54-IU60, IU62-IU68
TN110AU 105	-	22.0	29.0	1.8/4.0	2	IU2-IU8, IU12-IU19, IU21-IU27, IU30-IU36	IU2-IU8, IU12-IU18, IU20-IU26, IU28-IU34, IU36-IU42, IU46-IU52, IU54-IU60, IU62-IU68
TN120AU 100	-	11.0	14.0	1.8/4.0	2	IU2-IU8, IU12-IU19, IU21-IU27, IU30-IU36	IU2-IU8, IU12-IU18, IU20-IU26, IU28-IU34, IU36-IU42, IU46-IU52, IU54-IU60, IU62-IU68
TN120AU 101	-	12.0	15.0	1.8/4.0	2	IU2-IU8, IU12-IU19, IU21-IU27, IU30-IU36	IU2-IU8, IU12-IU18, IU20-IU26, IU28-IU34, IU36-IU42, IU46-IU52, IU54-IU60, IU62-IU68
TN120AU 102	-	10.0	13.0	1.8/4.0	2	IU2-IU8, IU12-IU19, IU21-IU27, IU30-IU36	IU2-IU8, IU12-IU18, IU20-IU26, IU28-IU34, IU36-IU42, IU46-IU52, IU54-IU60, IU62-IU68

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN12OAU 103	-	12.0	15.0	1.8/4.0	2	IU2-IU8, IU12-IU19, IU21-IU27, IU30-IU36	IU2-IU8, IU12-IU18, IU20-IU26, IU28-IU34, IU36-IU42, IU46-IU52, IU54-IU60, IU62-IU68
TN12OAU 105	-	15.0	21.0	1.8/4.0	2	IU2-IU8, IU12-IU19, IU21-IU27, IU30-IU36	IU2-IU8, IU12-IU18, IU20-IU26, IU28-IU34, IU36-IU42, IU46-IU52, IU54-IU60, IU62-IU68
TN11OBU 101	-	11.0	13.0	1.3/2.9	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11OBU 103	-	13.0	15.0	1.3/2.9	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11OBU 104	-	12.0	14.0	1.3/2.9	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN12OBU 101	-	10.0	11.0	1.1/2.4	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN12OBU 1P1	-	10.0	11.0	1.1/2.4	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN12OBU 103	-	11.0	12.1	1.1/2.4	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN12OBU 104	-	10.0	12.0	1.1/2.4	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN110BU 205	-	17.0	24.0	1.9/4.2	2	IU2-IU8, IU12-IU19, IU21-IU27, IU30-IU36	IU2-IU8, IU12-IU18, IU20-IU26, IU28-IU34, IU36-IU42, IU46-IU52, IU54-IU60, IU62-IU68
TN120BU 205	-	14.0	19.0	1.6/3.5	2	IU2-IU8, IU12-IU19, IU21-IU27, IU30-IU36	IU2-IU8, IU12-IU18, IU20-IU26, IU28-IU34, IU36-IU42, IU46-IU52, IU54-IU60, IU62-IU68
TN110LP	-	6.0	6.6	0.9/2.0	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN120LP	-	4.0	4.5	1.0/2.2	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN110PM 8	-	12.0	15.0	1.2/2.6	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN51PIU	-	1.8	1.8	0.5/1.1	1	IU39, IU40, IU45, IU46	IU69-IU70, IU78-IU81, IU88-IU89
TN16PIU	-	3.0	3.6	0.65/1.43	1	IU39, IU40, IU45, IU46	IU69, IU70, IU78, IU79, IU80, IU81, IU88, IU89
TN11RDU 9	-	6	6.6	1.1/2.4	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11RMU 901	-	7.7	8.6	1.1/2.4	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN11RMU902	-	8.2	9.0	1.1/2.4	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11ROOM	-	66.0	72.6	3.2/7.0	3	IU1-IU6, IU11-IU17, IU20-IU25, IU29-IU34	IU1-IU6, IU11-IU16, IU19-IU24, IU27-IU32, IU35-IU40, IU45-IU50, IU53-IU58, IU61-IU66
TN12SC1	-	11.0	14.9	1.0/2.2	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN12SC2	-	12.5	14.9	1.0/2.2	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11ST2	-	17.5	19.5	0.95/2.09	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN51SCC	-	18.0	20.0	1.2/2.6	1	IU11, IU28	-
TN52SCC	-	23.0	25.1	1.0/2.2	1	IU11, IU28	-
TNK2SCC	-	26.7	29.3	0.9/2.0	1	-	IU74, IU85
TN11SCS	-	0.2	0.3	0.8/1.8	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN52STG	-	13.0	14.1	0.5/1.1	1	IU42, IU44	-
TNK2STG	-	14.0	16.0	0.5/1.1	1	-	IU75, IU86
TN52STI	-	1.5	1.5	0.3/0.7	1	IU47	IU82
TN11SFIU	-	0.2	0.3	1.0/2.2	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11TDC	-	13.0	15.0	0.5/1.1	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN11TMX	800 ps/nm-C Band (odd & even wavelengths)-Fixed Wavelength -NRZ-PIN	40.3	44.3	1.4/3.1	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
	800 ps/nm-C Band-Fixed Wavelength -NRZ-PIN	42.1	46.4				
	1200 ps/nm-C Band-Tunable Wavelength -NRZ-PIN	44.5	51.2				
	1200 ps/nm-C Band-Tunable Wavelength -NRZ-APD	48.4	55.7				
TN12TMX	800 ps/nm-C Band-Tunable Wavelength -NRZ-PIN-XFP	32.4	37.1	1.2/2.7	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
	800 ps/nm-C Band-Tunable Wavelength -DRZ-PIN	41.0	45.5				
	800 ps/nm-C Band-Tunable Wavelength -NRZ-PIN	39.0	43.7				
	800 ps/nm-C Band (Odd & Even Wavelengths)-Fixed Wavelength -NRZ-PIN-XFP	31.4	36.1				
	10Gbit/s Multirate - 10km 10Gbit/s Multirate - 40km 10Gbit/s Multirate - 80km	31.4	36.1				
TN52TDX	-	57.3	63.0	1.4/3.1	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN54TOA	-	23.0	25.0	0.7/1.6	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN52TOG	-	41.8	46.0	0.85/1.87	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN52TOM	-	81.0	89.1	1.5/3.3	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN54THA	-	35.0	40.0	1.5/3.3	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN52TQX	-	91.5	100.0	1.6/3.5	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN53TQX	-	45.0	50.0	1.6/3.5	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN53TSXL	-	75.0	83.0	1.4/3.1	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN12VA1	-	6.5	7.2	1.0/2.2	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN12VA4	-	8.5	9.4	1.0/2.2	1	IU1-IU8, IU12-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN11WMU	-	12.0	15.0	1.0/2.2	1	IU1-IU8, IU11-IU27, IU29-IU36	IU1-IU8, IU11-IU42, IU45-IU68
TN12WSD9	-	25.4	28.5	2.7/6.0	2	IU1-IU7, IU12-IU18, IU20-IU26, IU29-IU35	IU1-IU7, IU11-IU17, IU19-IU25, IU27-IU33, IU35-IU41, IU45-IU51, IU53-IU59, IU61-IU67
TN13WSD9	-	25.4	28.5	2.9/6.4	3	IU1-IU6, IU12-IU17, IU20-IU25, IU29-IU34	IU1-IU6, IU11-IU16, IU19-IU24, IU27-IU32, IU35-IU40, IU45-IU50, IU53-IU58, IU61-IU66

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN12WSM9	-	25.4	28.5	2.7/6.0	2	IU1-IU7, IU12-IU18, IU20-IU26, IU29-IU35	IU1-IU7, IU11-IU17, IU19-IU25, IU27-IU33, IU35-IU41, IU45-IU51, IU53-IU59, IU61-IU67
TN13WSM9	-	25.4	28.5	2.9/6.4	3	IU1-IU6, IU12-IU17, IU20-IU25, IU29-IU34	IU1-IU6, IU11-IU16, IU19-IU24, IU27-IU32, IU35-IU40, IU45-IU50, IU53-IU58, IU61-IU66
TN11WSM D4	-	17.0	18.7	3.2/7.0	2	IU1-IU7, IU121-IU18, IU20-IU26, IU29-IU35	IU1-IU7, IU11-IU17, IU19-IU25, IU27-IU33, IU35-IU41, IU45-IU51, IU53-IU59, IU61-IU67
TN12WSM D4	-	12.0	15.0	2.6/5.7	2	IU1-IU7, IU12-IU18, IU20-IU26, IU29-IU35	IU1-IU7, IU11-IU17, IU19-IU25, IU27-IU33, IU35-IU41, IU45-IU51, IU53-IU59, IU61-IU67
TN11WSM D9	-	25	30	3.1/6.8	2	IU1-IU7, IU121-IU18, IU20-IU26, IU29-IU35	IU1-IU7, IU11-IU17, IU19-IU25, IU27-IU33, IU36-IU41, IU45-IU51, IU53-IU59, IU61-IU67

Board	Module Type	Typical Power Consumption at 25°C (77°F)(W)	Maximum Power Consumption at 55°C (131°F)(W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN11WSM D2	-	17.0	18.7	3.2/7.0	2	IU1-IU7, IU121-IU18, IU20-IU26, IU29-IU35	IU1-IU7, IU11-IU17, IU19-IU25, IU27-IU33, IU35-IU41, IU45-IU51, IU53-IU59, IU61-IU67

a: When the FC extension function of the TN12LOM board is used, the power consumption of the board increases by another 2 W.

Table A-2 Power consumption, weight and valid slots of the OptiX OSN 8800 T32 and OptiX OSN 8800 T64 cross-connect boards

Board	Power Consumption at 25°C (77°F) (W)	Power Consumption at 55°C (131°F) (W)	Power Consumption at Warm Backup (25°C, 77°F) (W)	Power Consumption at Warm Backup (55°C, 131°F) (W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TNK2S XM+T NK2X CT	530-3.6 x (64-n)	583-3.6 x (64-n)	190	210	3.74(8.1)+3.6(7.9)	1+1	-	TNK2S XM : IU10, IU44 TNK2 XCT : IU9, IU43
TNK2S XH+T NK2X CT	470-3.6 x (64-n)	517-3.6 x (64-n)	130	143	3.74(7.9)+3.6(7.9)	1+1	-	TNK2S XH : IU10, IU44 TNK2 XCT : IU9, IU43

Board	Power Consumption at 25°C (77°F) (W)	Power Consumption at 55°C (131°F) (W)	Power Consumption at Warm Backup (25°C, 77°F) (W)	Power Consumption at Warm Backup (55°C, 131°F) (W)	Weight (kg/lb.)	Number of Occupied Slots	Valid Slots of 8800 T32	Valid Slots of 8800 T64
TN52X CH01	243 - 3.6 x (32 - n)	267.3 - 3.6 x (32 - n)	65	72	3.4/7.5	1	IU9, IU10	-
TN52X CH02	101 - 1.12 x (32 - n)	111 - 1.12 x (32 - n)	43	47.3	3.4/7.5	1	IU9, IU10	-
TN52X CM01	339 - 3.6 x (32 - n) - 80 x m	368 - 3.6 x (32 - n) - 80 x m	125	138	3.8/8.4	1	IU9, IU10	-
TN52X CM02	124 - 1.12 x (32 - n) - 23 x m	136.4 - 1.12 x (32 - n) - 23 x m	67	73.7	3.8/8.4	1	IU9, IU10	-

NOTE

When the OptiX OSN 8800 T64 subrack grooms electrical-layer signals through the backplane, the XCT must be configured with SXM or SXH.

“n” is equal to the total number of tributary, line, and PID boards housed in a subrack.

- If a subrack is configured with VC-3 or VC-12 cross-connections, “m” is equal to 0.
- If a subrack is not configured with any VC-3 or VC-12 cross-connections, “m” is equal to 1.